



Die Datasheet, Logic Gate Device

74ACT574

OCTAL D-TYPE FLIP-FLOP w/ 3-STATE OUTPUTS

Die Source:



62 mils x 60 mils x 14 mils



Backside : Silicon

Topside Metal: Aluminum

General Description:

The 74ACT574 is a member of the Industries 74xxx series of Logic devices. The 74ACT574 is a device description which contains (8) D-Type Flip-Flops w/ 3-State Outputs.

IEEE / IEC LOGIC SYMBOL

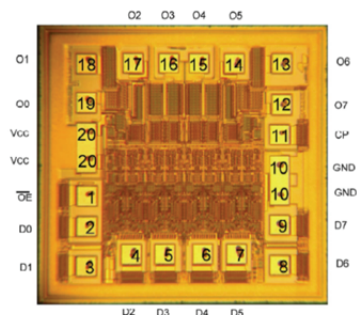

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITIONS	LIMIT	UNITS
Supply Voltage	V_{CC}		-0.5 to +7.0	V
DC Input Diode Current	I_{IK}	$V_I = -0.5V$	-20.0	mA
		$V_I = V_{CC} + 0.5V$	20.0	mA
DC Input Voltage	V_I		-0.5 to $V_{CC} + 0.5$	V
DC Output Diode Current	I_{OK}	$V_O = -0.5V$	-20.0	mA
		$V_O = V_{CC} + 0.5V$	20.0	mA
DC Output Voltage	V_O		-0.5 to $V_{CC} + 0.5$	V
DC Output Source or Sink Current	I_O		± 50.0	mA
DC VCC Current	I_{CC}		± 50.0	mA
DC GND Current	I_{DD}		± 50.0	mA
Storage Temp	T_{STG}		-65.0 to +150	$^{\circ}C$
Max Junction Temp	T_J		150.0	$^{\circ}C$

RECOMMENDED OPERATING CONDITIONS

PARAMETER	TECH	SYMBOL	LIMIT	UNITS
Supply Voltage	ACT	V_{CC}	4.5 to 5.5	V
Input Voltage		V_I	0 to V_{CC}	V
Output Voltage		V_O	0 to V_{CC}	V
Operating Temperature		T_A	-40 to +85	$^{\circ}C$
Minimum Input Edge Rate	ACT	$\Delta V / \Delta t$	125	mV/ns

DC ELECTRICAL CHARACTERISTICS

PARAMETER	TECH	SYMBOL	VCC (V)	CONDITIONS	Guarenteed Limits		UNITS	NOTE
					Min@25C	Min@85C		
Minimum HIGH level Input Voltage								
	ACT	V_{IH}	4.5 5.5	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$	2.00 2.00	2.00 2.00	V	
Maximum LOW level Input Voltage								
	ACT	V_{IL}	4.5 5.5	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$	0.80 0.80	0.80 0.80	V	
Minimum HIGH level Output Voltage								
	ACT	V_{OH}	4.5 5.5	$I_{OUT} = -50\mu A$	4.40 5.40	4.40 5.40	V	
	ACT	V_{OH}	4.5 5.5	$V_{IN} = V_{IL}$ or V_{IH} , $I_{OL} = -24mA$	3.86 4.86	3.76 4.76	V	1
				$V_{IN} = V_{IL}$ or V_{IH} , $I_{OL} = -24mA$				



Die Datasheet, Logic Gate Device

74ACT574

OCTAL D-TYPE FLIP-FLOP w/ 3-STATE OUTPUTS

DC ELECTRICAL CHARACTERISTICS - CONT'D

PARAMETER	TECH	SYMBOL	VCC (V)	CONDITIONS	Guarenteed Limits		UNITS	NOTE
					Min@25C	Min@85C		
Maximum LOW level Output Voltage								
	ACT	V_{OL}	4.5 5.5	$I_{OUT} = -50\mu A$	0.1 0.1	0.1 0.1	V	
	ACT	V_{OL}	4.5 5.5	$V_{IN} = V_{IL}$ or V_{IH} , $I_{OL} = -24mA$ $V_{IN} = V_{IL}$ or V_{IH} , $I_{OL} = -24mA$	0.36 0.36	0.44 0.44	V	1
Maximum Input Leakage Current	ACT	I_{IN}	5.5	$V_I = V_{CC}$ or GND	± 0.1	± 1.0	μA	2
Minimum Dynamic Output Current	ACT	I_{OLD}	5.5	$V_{OLD} = 1.65V$ Max	- -	75	mA	
	ACT	I_{OHD}	5.5	$V_{OHD} = 3.85V$ Min	- -	-75	mA	
Maximum Quiescent Supply Current	ACT	I_{CC}	5.5	$V_{IN} = V_{CC}$ or GND	4	40	μA	2

Note(s):

1. All Outputs Loaded; thresholds on input associated with output under test
2. I_{IN} and I_{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V VCC

AC ELECTRICAL CHARACTERISTICS

PARAMETER	TECH	SYMBOL	VCC (V)	CONDITIONS	Guarenteed Limits		Guarenteed Limits		UNITS
					Min@25C	Max@25C	Min@85C	Max@85C	
Propagation Delay: Data to Ouput	ACT	tPLH	5.0	$C_L = 50pF$	2.5	11.0	2.0	12.0	ns
	ACT	tPHL	5.0	$C_L = 50pF$	2.0	10.0	1.5	11.0	ns
Output Enable Time	ACT	tPZH	5.0	$C_L = 50pF$	2.0	9.5	1.5	10.0	ns
	ACT	tPZL	5.0	$C_L = 50pF$	2.0	9.0	1.5	10.0	ns
Output Disable Time	ACT	tPHZ	5.0	$C_L = 50pF$	2.0	10.5	1.5	11.5	ns
	ACT	tPLZ	5.0	$C_L = 50pF$	2.0	8.5	1.5	9.0	ns