


NOTES:

1. PIN MATERIAL: BRASS ALLOY 360, 1/2 HARD.

2. PIN FINISH: 10 micro inches GOLD OVER 100 micro inches NICKEL.

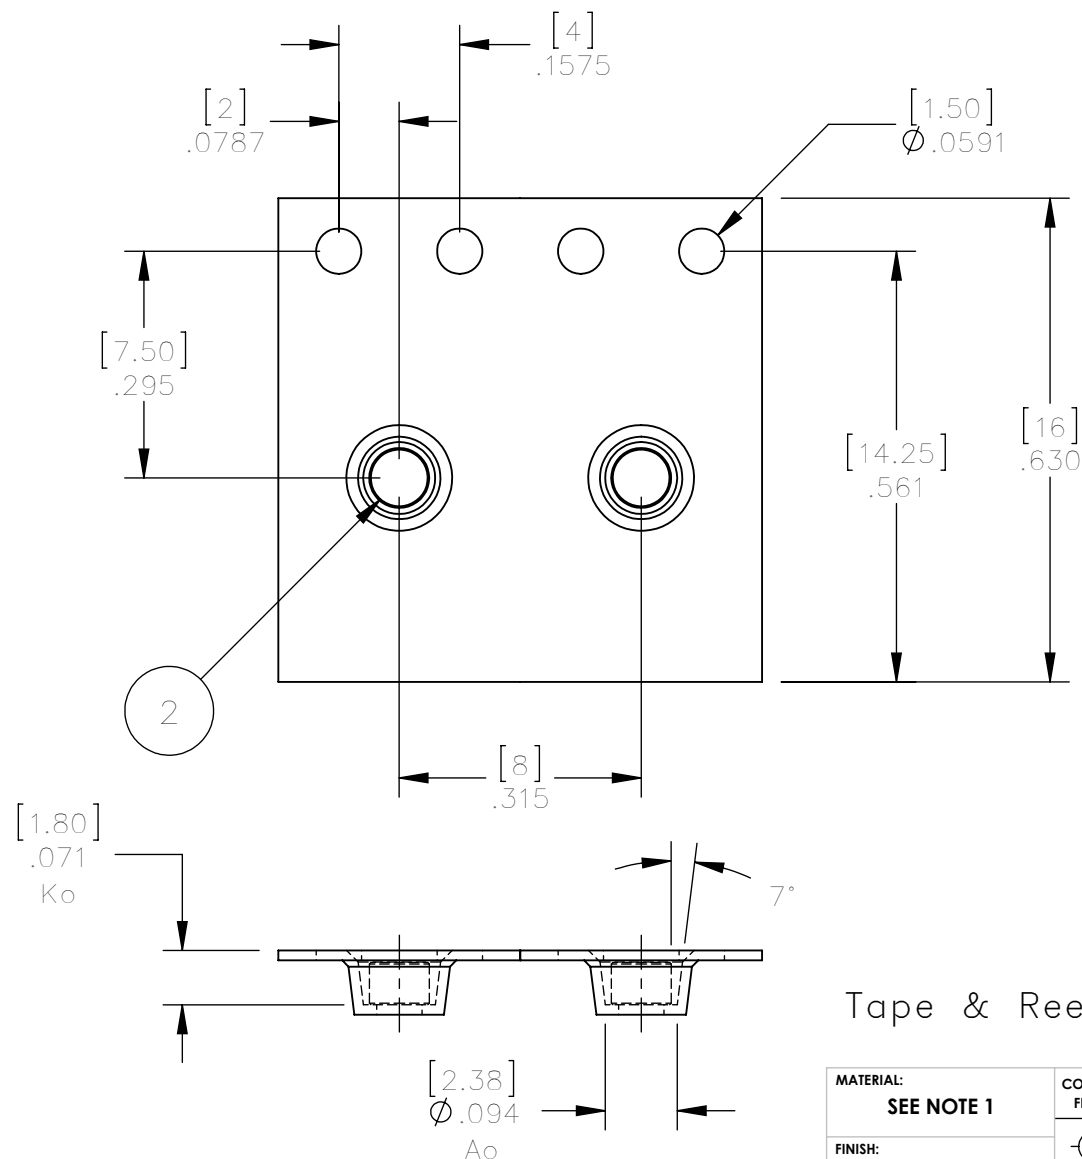


4,000 Parts per 13" Reel

Tape & Reel Order: #1578-3-57-15-00-00-03-0

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	P097-00-000-15-783000	TAPE POCKET	1
2	1578-3-00-15-00-00-03-0	DISC	1

REV.	DESCRIPTION	BY	DATE	ECN NO.
------	-------------	----	------	---------

MATERIAL:
SEE NOTE 1FINISH:
SEE NOTE 2PIN SURFACE AREA:
N/AUNITS OF MEASUREMENT:
INCHESCORNER BREAKS AND
FILLETS .002" MAX.

TOLERANCES UNLESS
OTHERWISE SPECIFIED

PIN TOLERANCE:
LENGTHS $\pm .005$
DIAMETERS $\pm .002$
ANGLES ± 2

INSULATOR TOLERANCE:
LENGTHS $\pm .005$
THICKNESS $\pm .003$
HOLE TO HOLE $\pm .001$
NON ACCUMULATIVE

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY
TO MILL-MAX MFG. CORP.
ANY REPRODUCTION OR USE
OF THIS DOCUMENT IS PROHIBITED
WITHOUT THE WRITTEN CONSENT
OF MILL-MAX MFG. CORP.

DRAWN: Steve C.

CHECKED: Darren M.

CUSTOMER:

APPROVAL:



DATE: 12/19/15

ENGINEER: Steve C.

MILL-MAX MFG.

OYSTER BAY, NY

MILL-MAX® MFG. CORP.
P.O. BOX 300, 190 PINE HOLLOW ROAD
OYSTER BAY, N.Y. 11771-0300
TEL: (516) 922-6000, FAX: (516) 922-9253
WEB-SITE: www.MILL-MAX.com

DESCRIPTION:

.078" x .055" DISC ON TAPE & REEL

DRAWING NUMBER:

6405

REV.

-

FILE NAME: 'MAX8'/SOCKETS/6405.drw

SHEET 1 OF 1