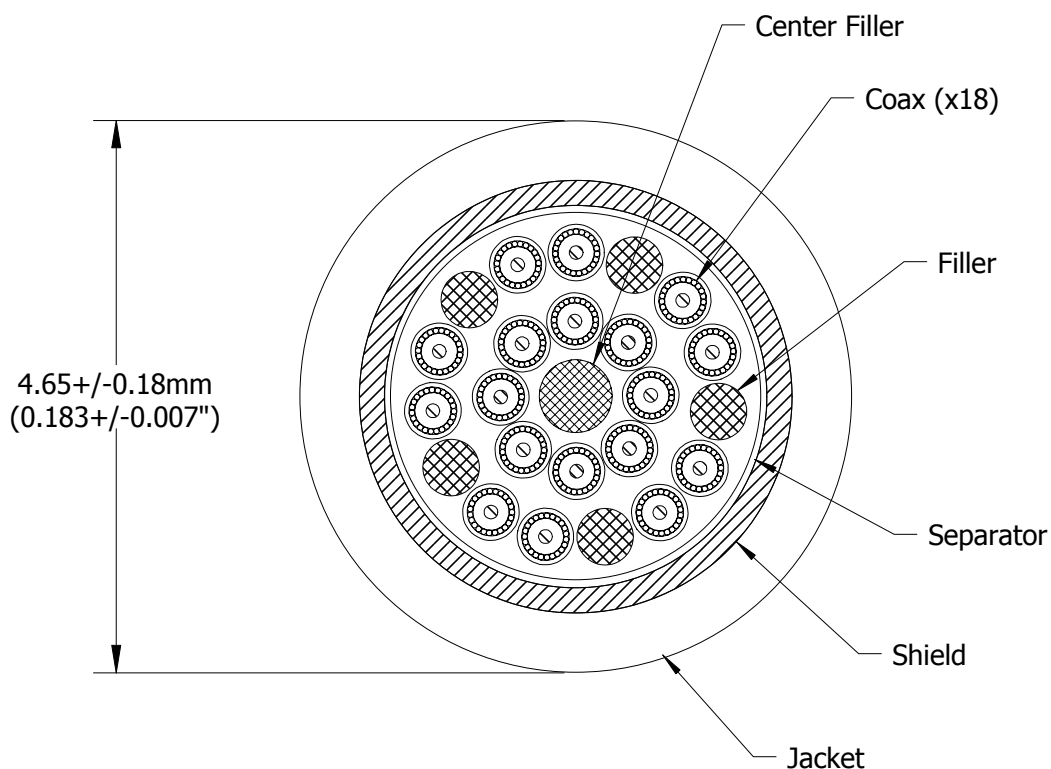


**NOTES**

Center Filler: Aramid Fiber, >60 lbs. Pull Force

Filler: Nylon

COAX: (X18)

Conductor: 38 AWG, Solid SPC

Insulation: PFA, Green

Served Shield: 44 AWG TPC

Jacket: PFA, 0.5mm (0.020") OD.

Color (Inner): Black, Brown, Red, Orange, Yellow, Green, Blue, Violet

(Outer): Gray (2), Black, Brown, Red, Orange, Yellow, Green, Blue, Violet

Impedance: 50 Ohm Ref.

Capacitance: 29 pF/ft +/- 3 pF/ft Ref.

SEPARATOR: PTFE**BRAID: 40 AWG SPC, >90% coverage****JACKET: PVC****COLOR: Black**

This document is the
property of TEMP-FLEX.
It may not be disclosed,
reproduced, or otherwise
used without permission.

Rev

A

DCR

4132

Description

Preliminary Release.

App'd

KP

Date

12/15/14