


	TITLE	PART No.	REV	PAGE
	32 AWG, 100 Ohm, Twinax Cable	100TX-08	2	1 of 1

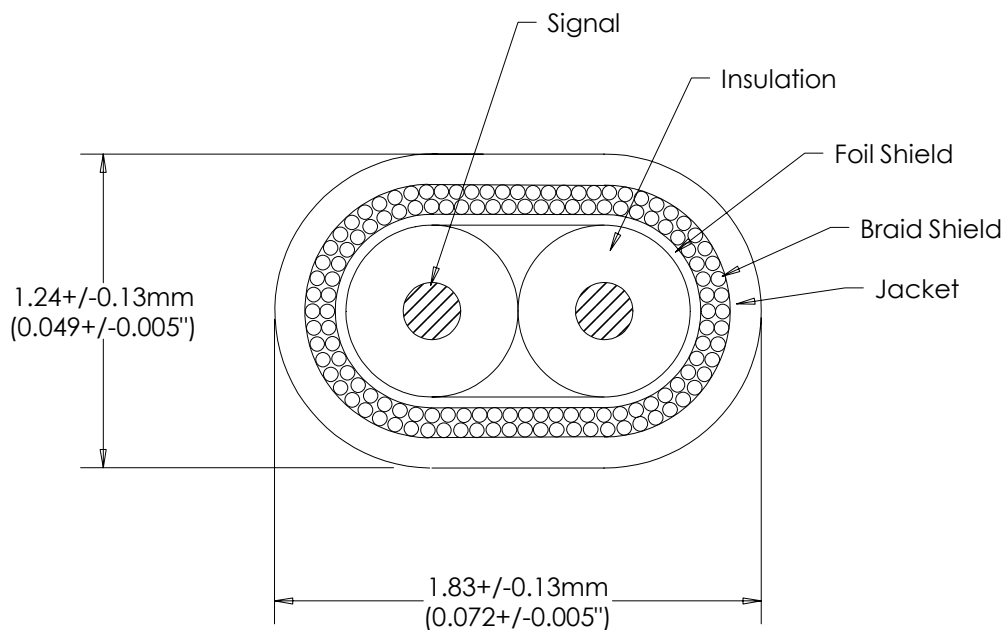

NOTES

Signal: 32 AWG, Solid Silver Plated Copper

Insulation: FEP, 0.0235"+/-0.001"

Color: One Blue, One Green

Shield: Aluminum/Polyester Tape Wrap (Aluminum Side Out)

Braid Shield: 44 AWG Tin Plated Copper, >90% Coverage

Jacket: Polyurethane, 0.006" Wall Thickness, Black

Differential Impedance: 100+/-5 Ohms

Capacitance: 14.5 pF/ft

Propagation Delay: 1.46+/-0.01 ns/ft

Within Pair Skew: <5ps/ft

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	1	2575	Initial Release.	KP	4/20/11
	2	2846	Jacket Insulation Material to Polyurethane.	KP	1/5/12
	2	3119	Updated Specification Template	KP	11/5/12