
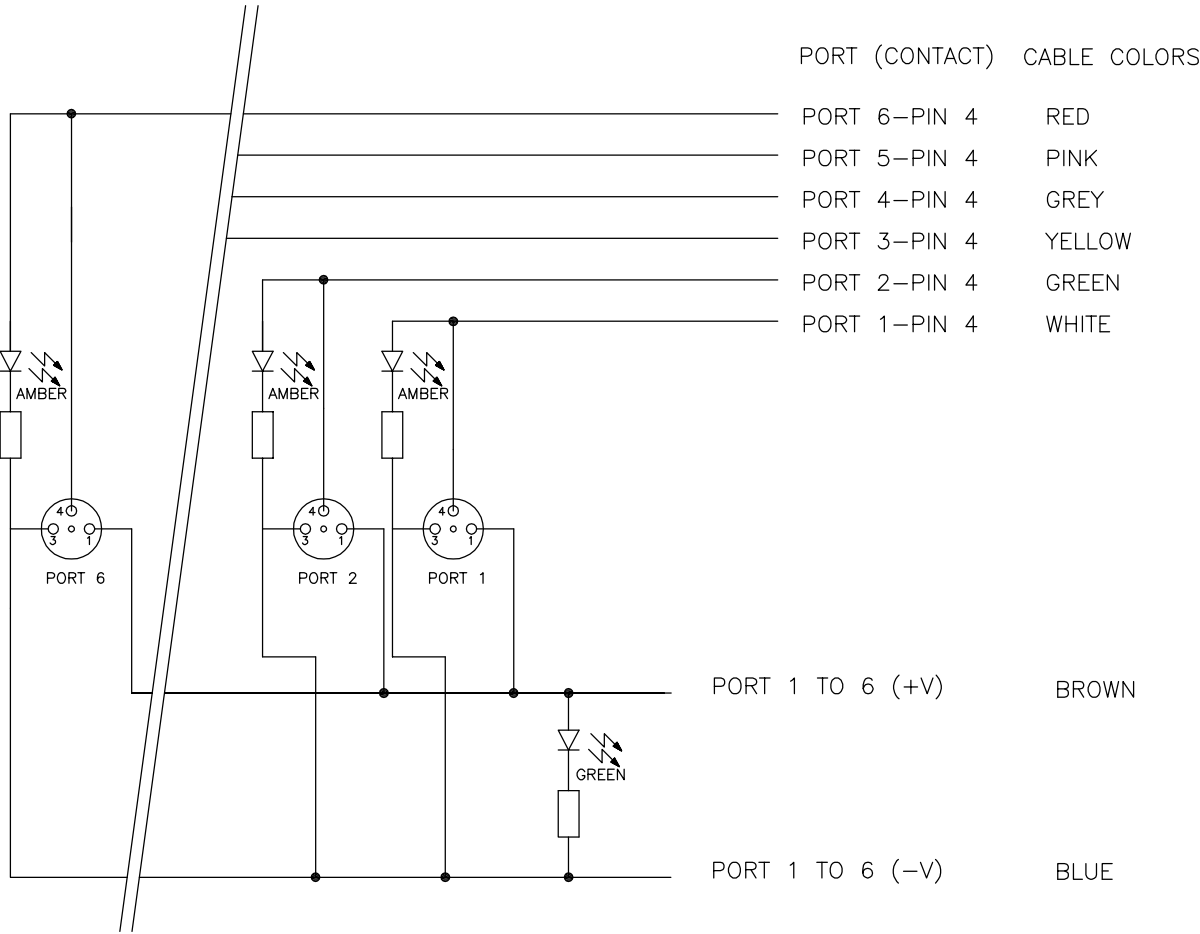
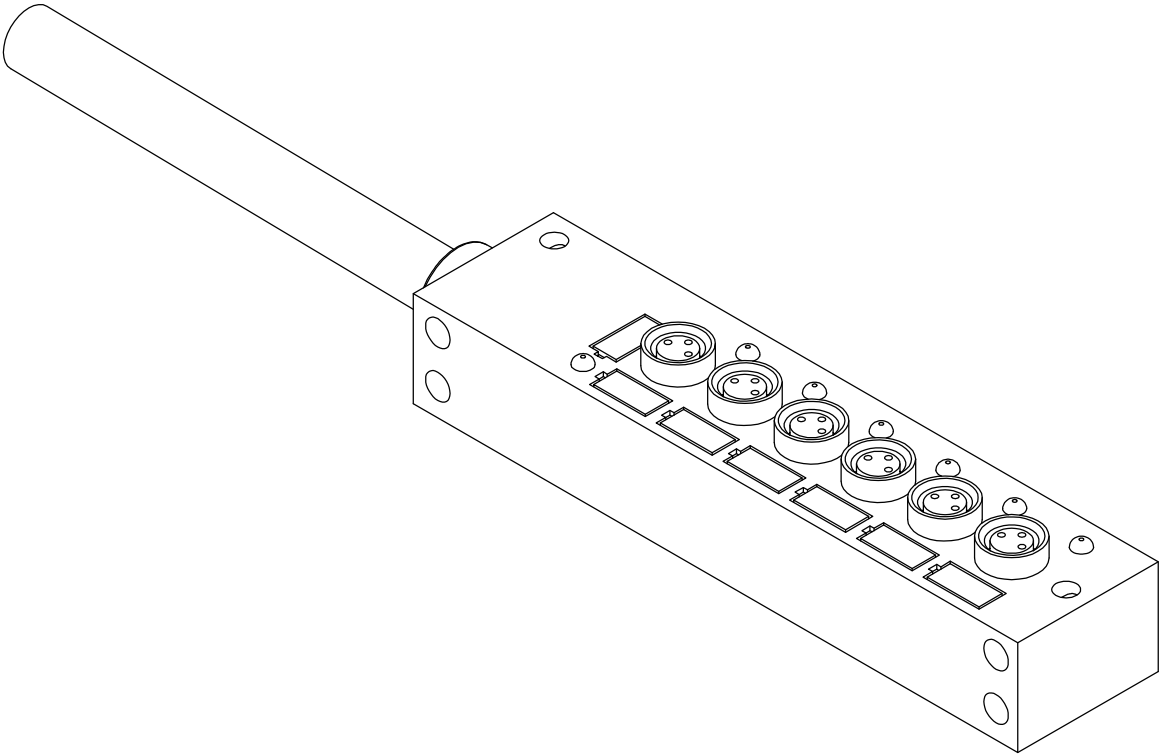
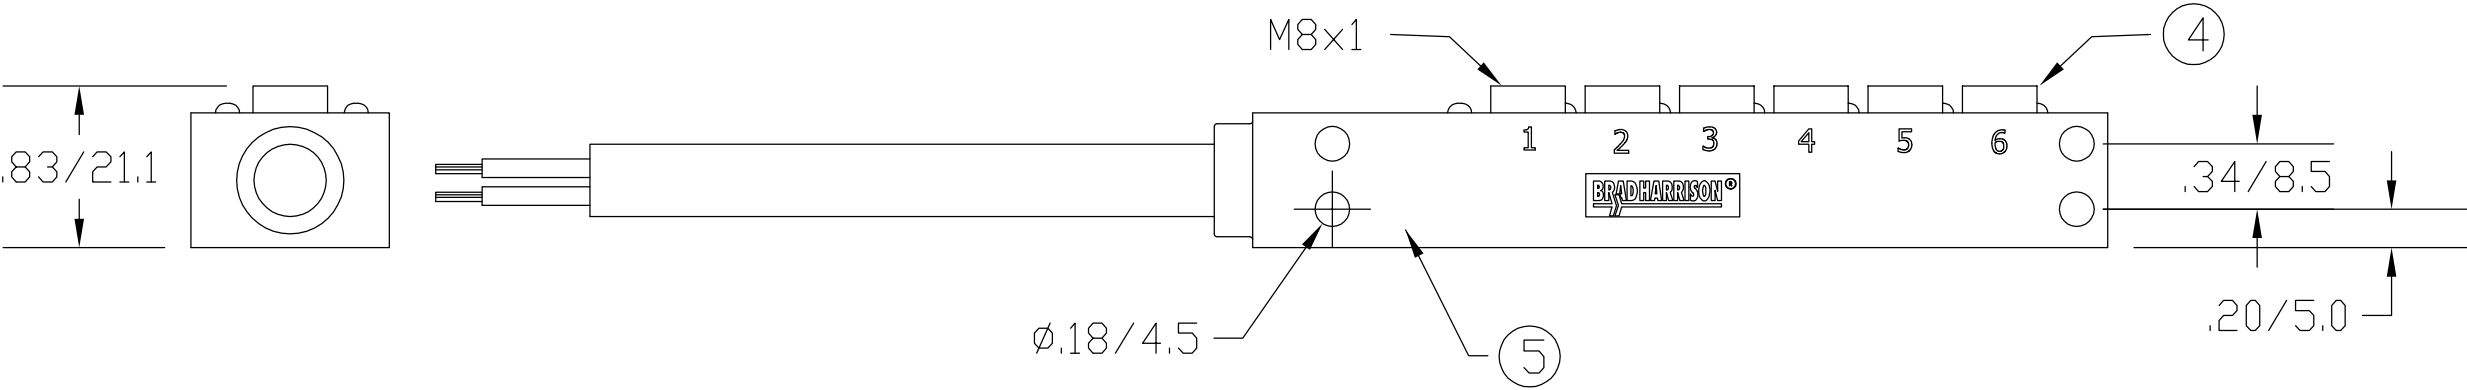


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
120113-0011	BEY601P-FBP-05	16.40' +6.50" -0 [5.0M +165.1 -0]

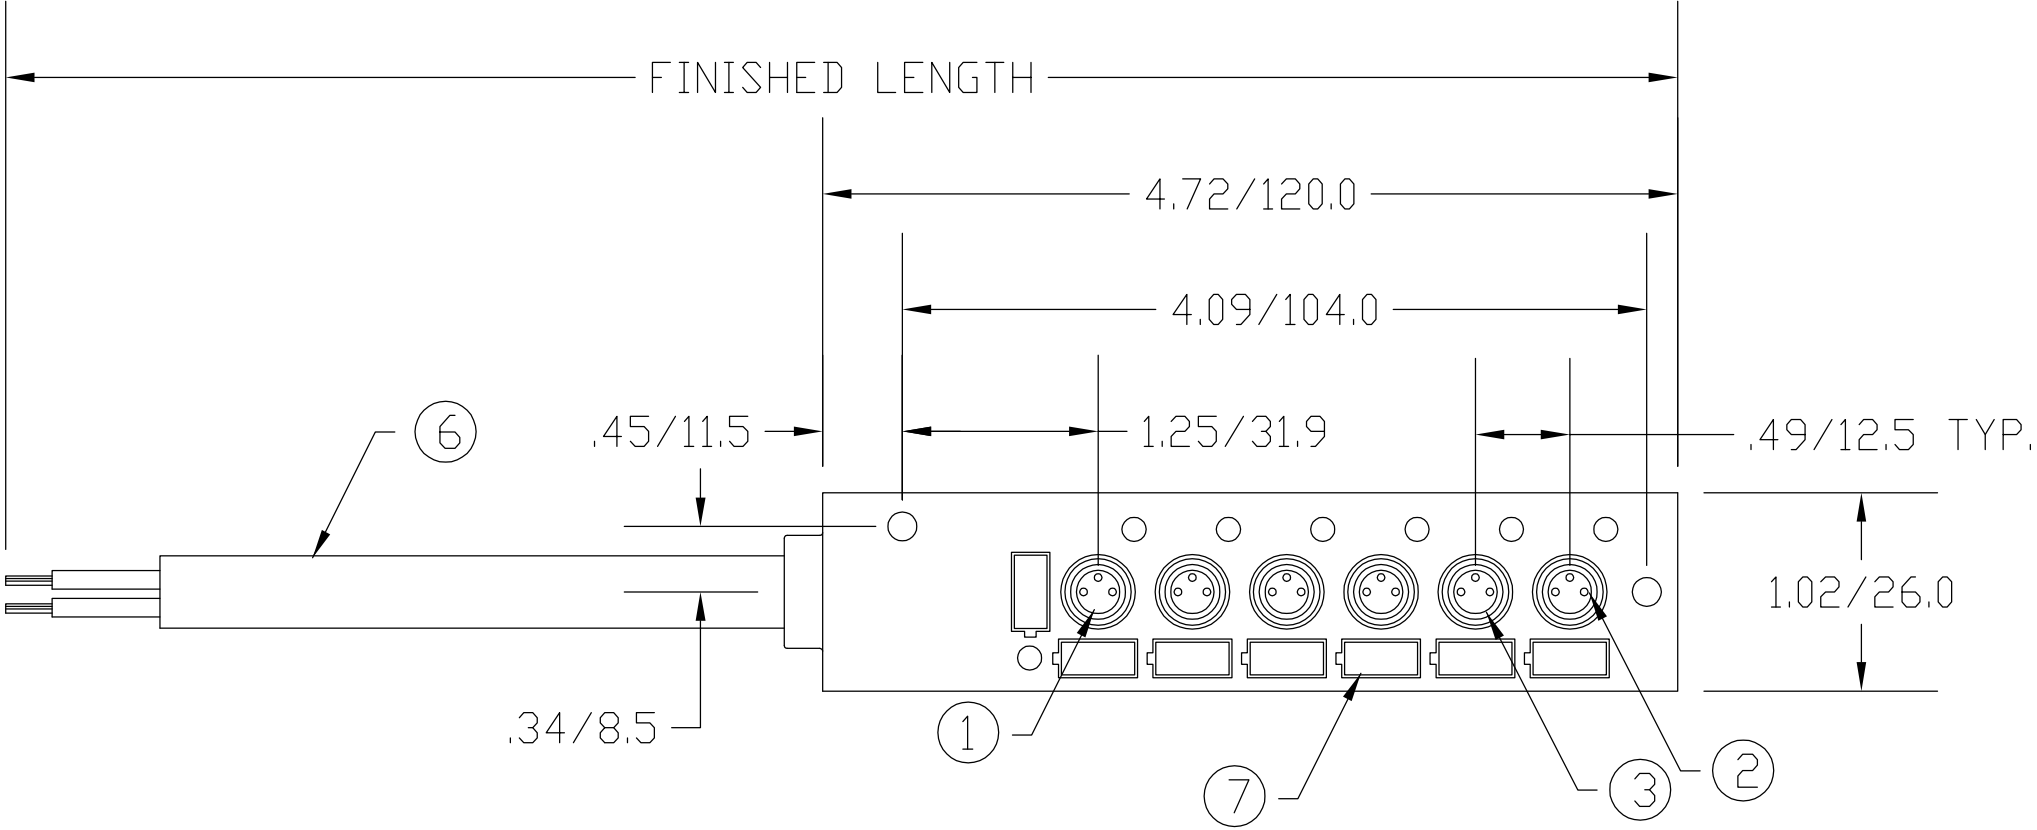

WIRING DIAGRAM

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYESTER	YELLOW
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	NYLON	YELLOW
6	CABLE- 18AWG, 2 CONDUCTOR; 22 AWG, 6 CONDUCTOR, 300V	PVC	YELLOW
7	LABEL	ABS	WHITE

RLSD DRAWING EC NO: WNA2009-0641 DRWN: BWOODMAN 3/31/09 CHK'D: JM APPR: JFMURPHY 2009/04/08 A	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ----	DESIGN UNITS ----	◎ ▱ THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY BW	DATE 2009/03/31	TITLE NANO-CHANGE MPIS 6 PORT PNP SIDE ENTRY 5 METER PUR CABLE molex MOLEX INCORPORATED				
			4 PLACES	±----	±----	CHECKED BY VO	DATE 2009/03/31					
			3 PLACES	±----	±----	APPROVED BY	DATE					
			2 PLACES	±----	±.01	----	----				DOCUMENT NO. SD-120113-001	
			1 PLACE	±0.3	±----	MATERIAL NO. SEE CHART			SHEET NO. 1 OF 1			
			ANGULAR ±----°			SIZE C			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	2 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C