
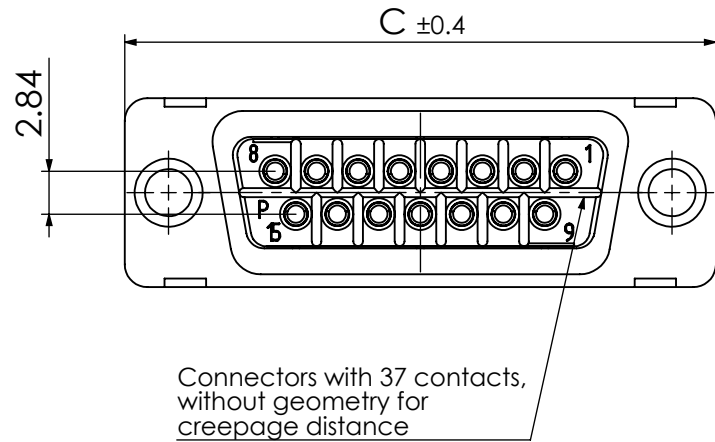
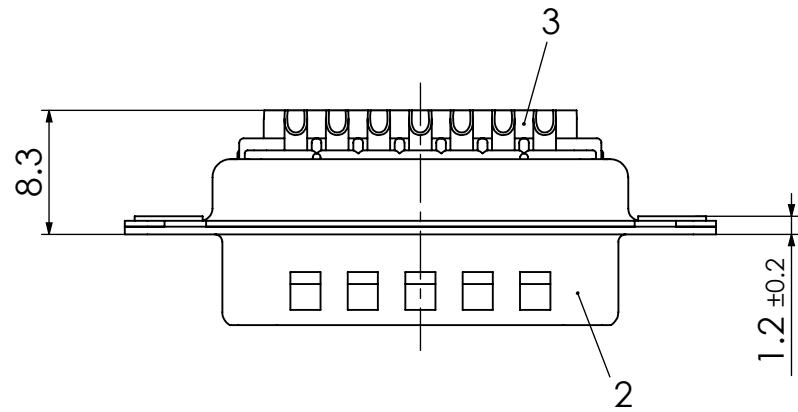
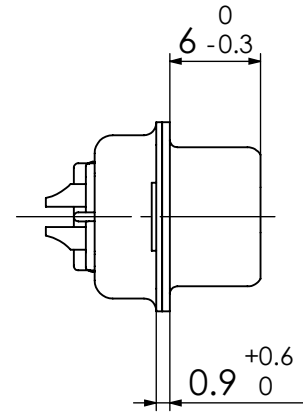


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

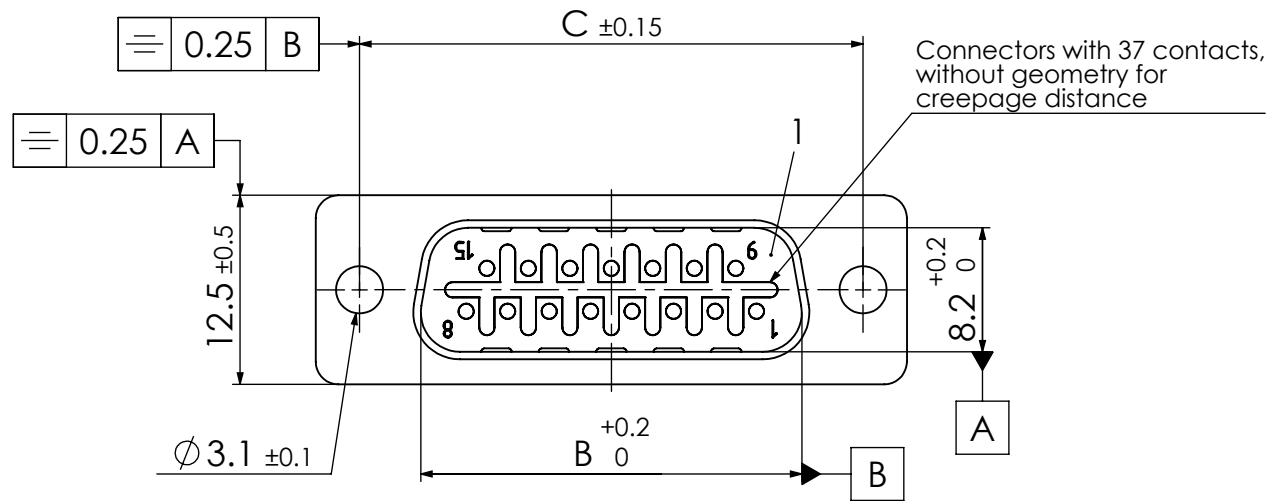

Fxx*1) PA-K700

e.g. F15PA-K700

RoHS compliant

*1) xx No. of contacts 09, 15, 25 or 37

xx	A [mm]	B [mm]	C [mm]
09	30.8	16.9	25
15	39.1	25.2	33.3
25	53	38.9	47.04
37	69.3	55.3	63.5

Protection standard IP67, 100% checked according to DIN EN60529

3	xx	Signal contact	P0 / Brass	AuroPur / AWG 20	
2	1	Shell	Brass	tin plated	
1	1	Insulator	PBT (-25°C - +70°C)	red	
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class	
			 Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1 TITLE Waterproof D-Sub Miniature Connector	
			NAME / DATE		
		DRAWN	sschref 22-05-2013		
		CHECKED	ADenzinger 22-05-2013		
				DWG.NO.	REV.
				FxxPA-K700	1
1					
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR:	PAGES 1