
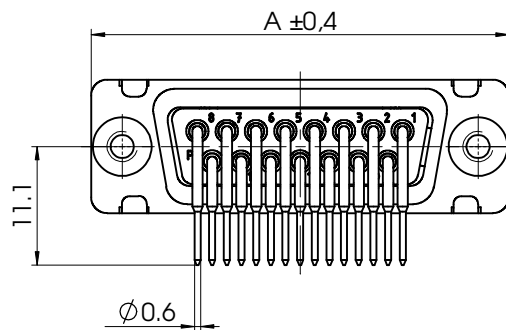




*1) xx No. of contacts 09, 15, 25 or 37
*2) y for performance classes 1, 2 or 3
(contact cycle for G1/G2/G3 = 500/200/50)

xx	A (mm)	B (mm)	C (mm)	*ØE (mm)	*H (mm)	*J (mm)
09	30,8	16,9	25	Ø 1	9,4	2,54
15	39,1	25,2	33,3			
25	53	38,9	47,04			
37	69,3	55,3	63,5			

*PCB hole patterns, ØE, H, J on supplement AM0024

4	2	Clinch nut	FT 4-40 / Steel	tin plated
3	xx	Signal contact	P5 / Brass	G1/G2/G3
2	1	Shell	Steel	tin plated
1	1	Insulator	PCT (-55°C - +150°C)	natural
No.	Sf.	Part	Type Description/Material	Surface plating/Colour/Class

			 Measurement without tolerance acc. to ISO 2768-m SCALE 2:1 DATE NAME DRAWN 19-11-2004 sschref CHECKED 19-11-2004 ffoßmann  www.fctgroup.com ORIGINAL: DIN A3-DRAWING AS A FILE	TITLE		D-Sub Miniature Connector	
					DWG.NO.	FHTxxP5Gy	REV.
							1
1							
REV.	DATE	CH.-NO.			REPLACEMENT FOR:		PAGES

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.