

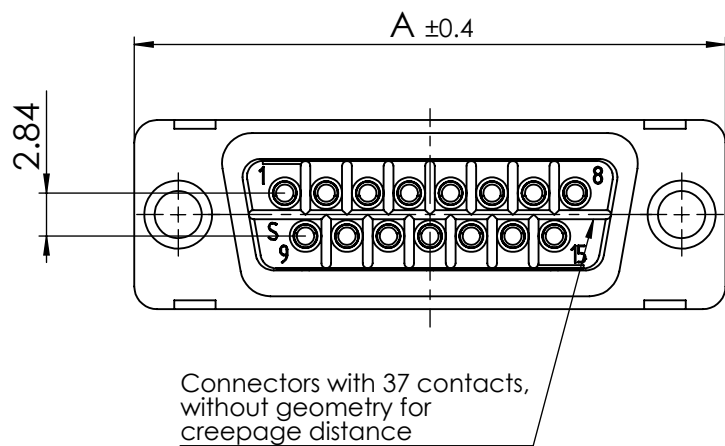
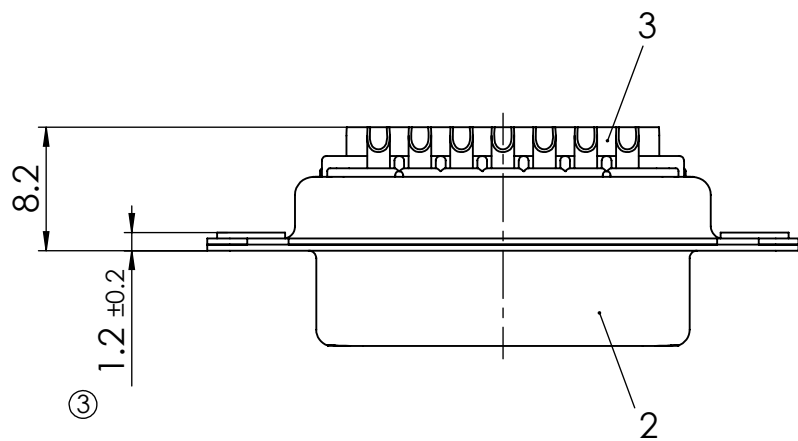


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

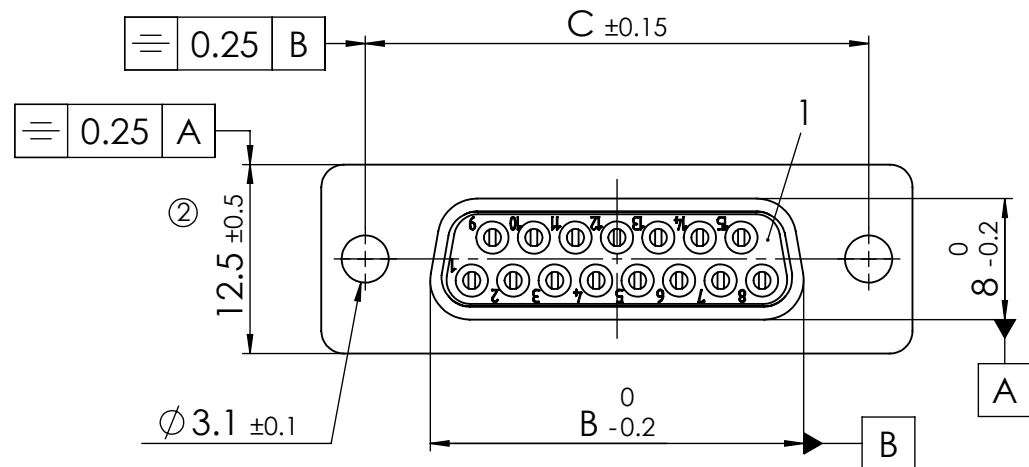

Connectors with 37 contacts,
without geometry for
creepage distance

RoHS compliant

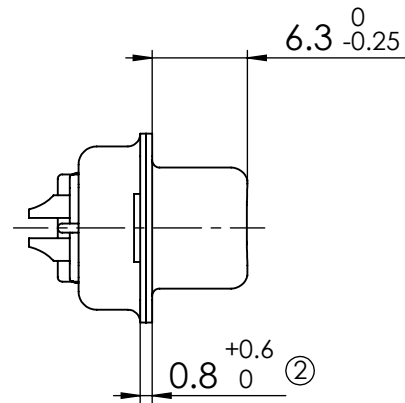

Fxx*1)S-K700

e.g. F09S-K700

*1) xx No. of contacts 09, 15, 25 or 37

xx	A [mm]	B [mm]	C [mm]
09	30.8	16.4	25
15	39.1	24.7	33.3
25	53	38.5	47.04
37	69.3	54.9	63.5

Protection standard IP67, 100% checked according to DIN EN60529

④	3	xx	Signal contact	S0 / Brass	0.8µm Au / AWG 20		
	2	1	Shell	Brass	tin plated		
	1	1	Insulator	PBT (-25°C - +70°C)	red		
	No.	St.	Part	Type Description/Material	Surface plating/Colour/Class		
					Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1	TITLE Waterproof D-Sub Miniature Connector
					NAME / DATE		
			DRAWN		Denzinger 08-04-2003		
			CHECKED		sschref 02-12-2014		
4	24-10-2014	23687					
	3	21-01-2013	23237		DWG.NO.	FxxS-K700	REV. 4
	2	13-03-2008	22220				
	1						
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE				