
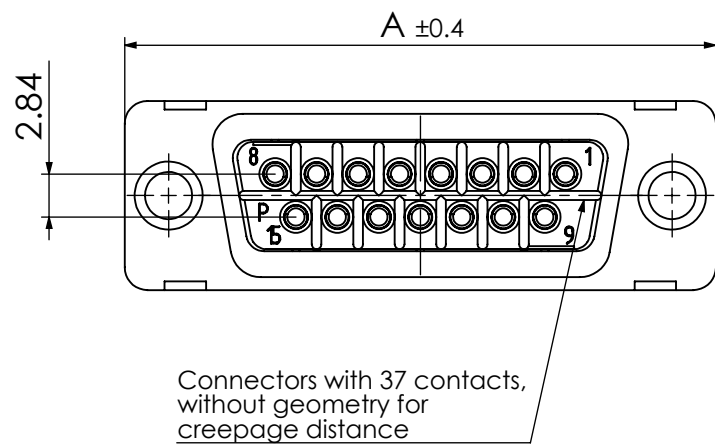
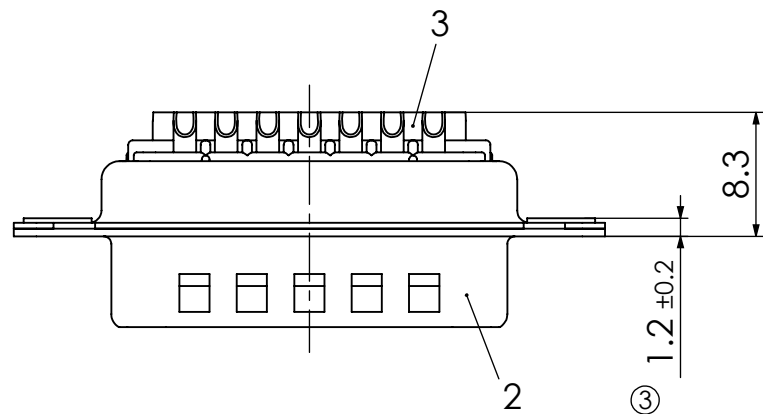
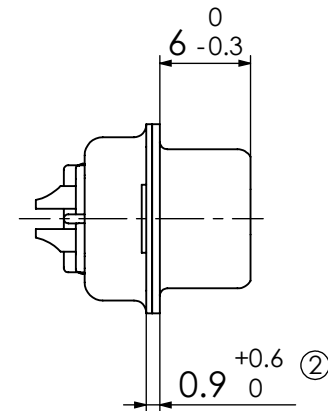


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

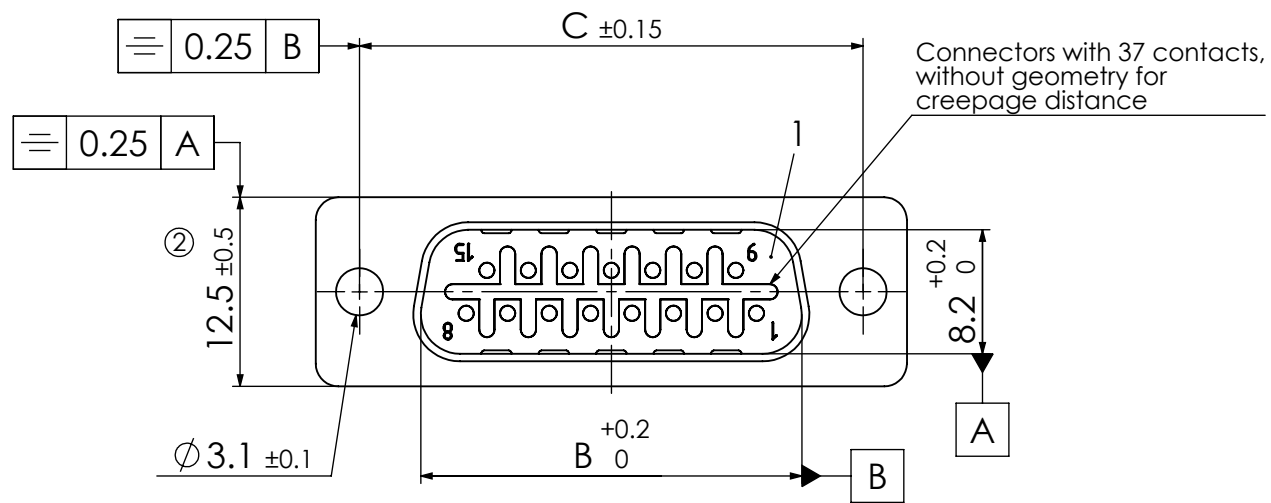

Fxx*₁)P-K700

e.g. F09P-K700

RoHS compliant

*₁) xx No. of contacts 09, 15, 25 or 37

xx	A [mm]	B [mm]	C [mm]
09	30.8	16.9	25
15	39.1	25.2	33.3
25	53	38.9	47.04
37	69.3	55.3	63.5

Protection standard IP67, 100% checked according to DIN EN60529

④

3	xx	Signal contact	P0 / Brass		0,8µm Au / AWG 20
2	1	Shell	Brass		tin plated
1	1	Insulator	PBT (-25°C - +70°C)		red
No.	St.	Part	Type Description/Material		Surface plating/Colour/Class
				Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1
			NAME / DATE		TITLE Waterproof D-Sub Miniature Connector
			DRAWN Denzinger 27-09-2002		
			CHECKED sschref 02-12-2014		
4	24-10-2014	23687			
3	21-01-2013	23237			
2	13-03-2008	22220			
1					
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE		DWG.NO. FxxP-K700
			REPLACEMENT FOR:		REV. 4
					PAGES 1