


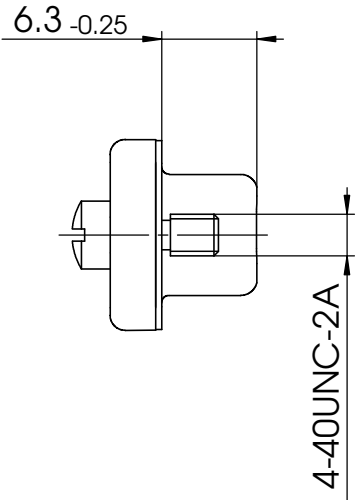

FSSKx *1) S
e.g. FSSK1S

*1) x Shell size 1, 2, 3, 4 or 5

Shell size	A mm	B mm	C mm	D mm	E mm
1	30.8	16.4	25	8	12.5
2	39.1	24.7	33.3	8	12.5
3	53	38.5	47.04	8	12.5
4	69.3	54.9	63.5	8	12.5
5	66.9	52.5	61.1	10.8	15.4

② max. torque are 40 Ncm

②	3	2	Screw		4-40 / Brass	nickel plated			
	2	1	Shell		Brass	tin plated			
	1	1	Shielding flange		FSSK1-5 / Zinc die-cast	nickel plated			
	No.	St.	Part		Type Description/Material	Surface plating/Colour/Class			
					Measurement without tolerance occ. to ISO 2768-m	SCALE 2:1	TITLE Shielded Dust Cap		
					NAME / DATE				
				DRAWN	Denzinger 17-06-2002				
				CHECKED	kBurkhardt 13-09-2007				
									
	2	12-09-2007	21987				DWG.NO.	FSSK1-5S	REV
	1								2
	REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE			REPLACEMENT FOR:		PAGES