

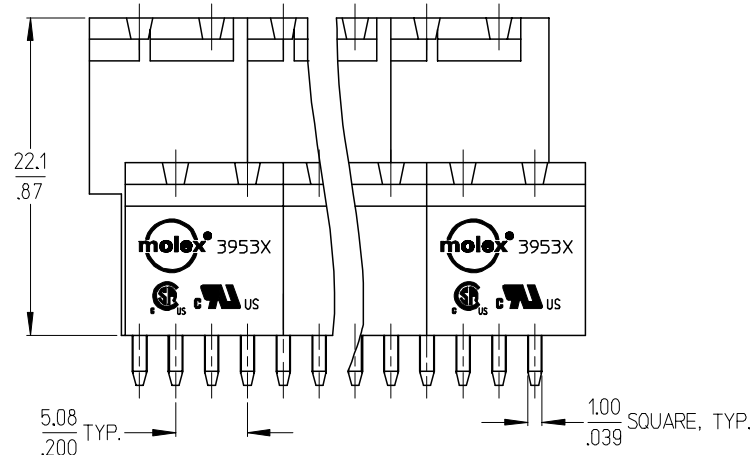
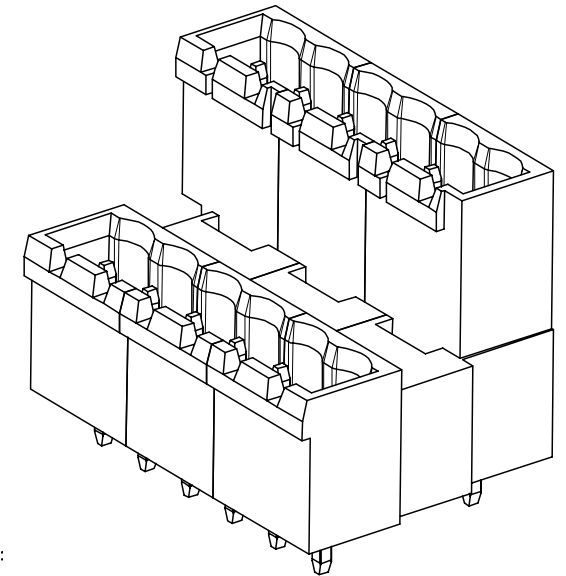


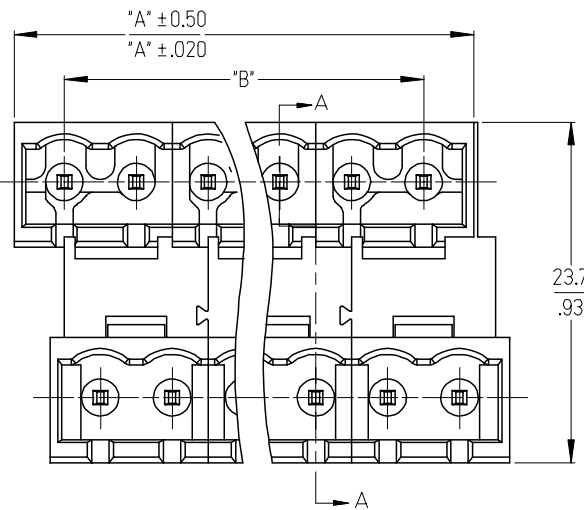


SECTION A-A

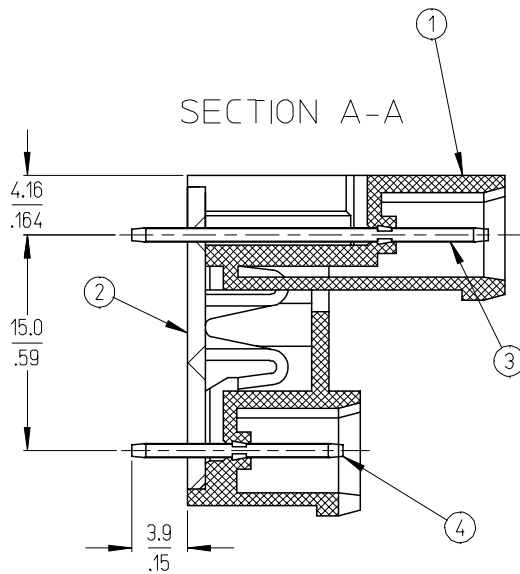

SPECIFICATIONS:

- MATERIAL:
 - BODY: PA46 (UL 94V-0).
 - COVER: PA46 (UL 94V-0).
 - LONG TERMINAL: BRASS.
 - SHORT TERMINAL: BRASS.
- ELECTRICAL RATING: 300V, 15A.
- DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
- BREAKDOWN VOLTAGE: 4000V.
- INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
- OPERATING TEMPERATURE: -40°C TO +140°C.
- NUMBER OF CIRCUIT POSITIONS AVAILABLE= 4 THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
- ALL COMPONENTS ARE ROHS COMPLIANT.

INITIAL RELEASE EC NO: ET2007-0364 DRWN: CLYORK 2007/03/28 CHKD: JMACNEIL 2007/04/04 APPR: JMACNEIL 2007/04/05 A	DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY C. YORK	DATE 2007/03/28	TITLE 5.08MM, EURO DUAL HEADER VERTICAL, CLOSED END, STACKABLE, HIGH TEMP		
		4 PLACES	± ---	± ---	CHECKED BY J. MACNEIL	DATE 2007/03/28			
		3 PLACES	± ---	± .005					
			2 PLACES	± 0.13	± .01	APPROVED BY J. MACNEIL	DATE 2007/03/28	MOLEX INCORPORATED	
			1 PLACE	± 0.3	± ---				
			ANGULAR ± 2 °			MATERIAL NO.	DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE SHEET 2		SD-39539-002	
	REV				SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

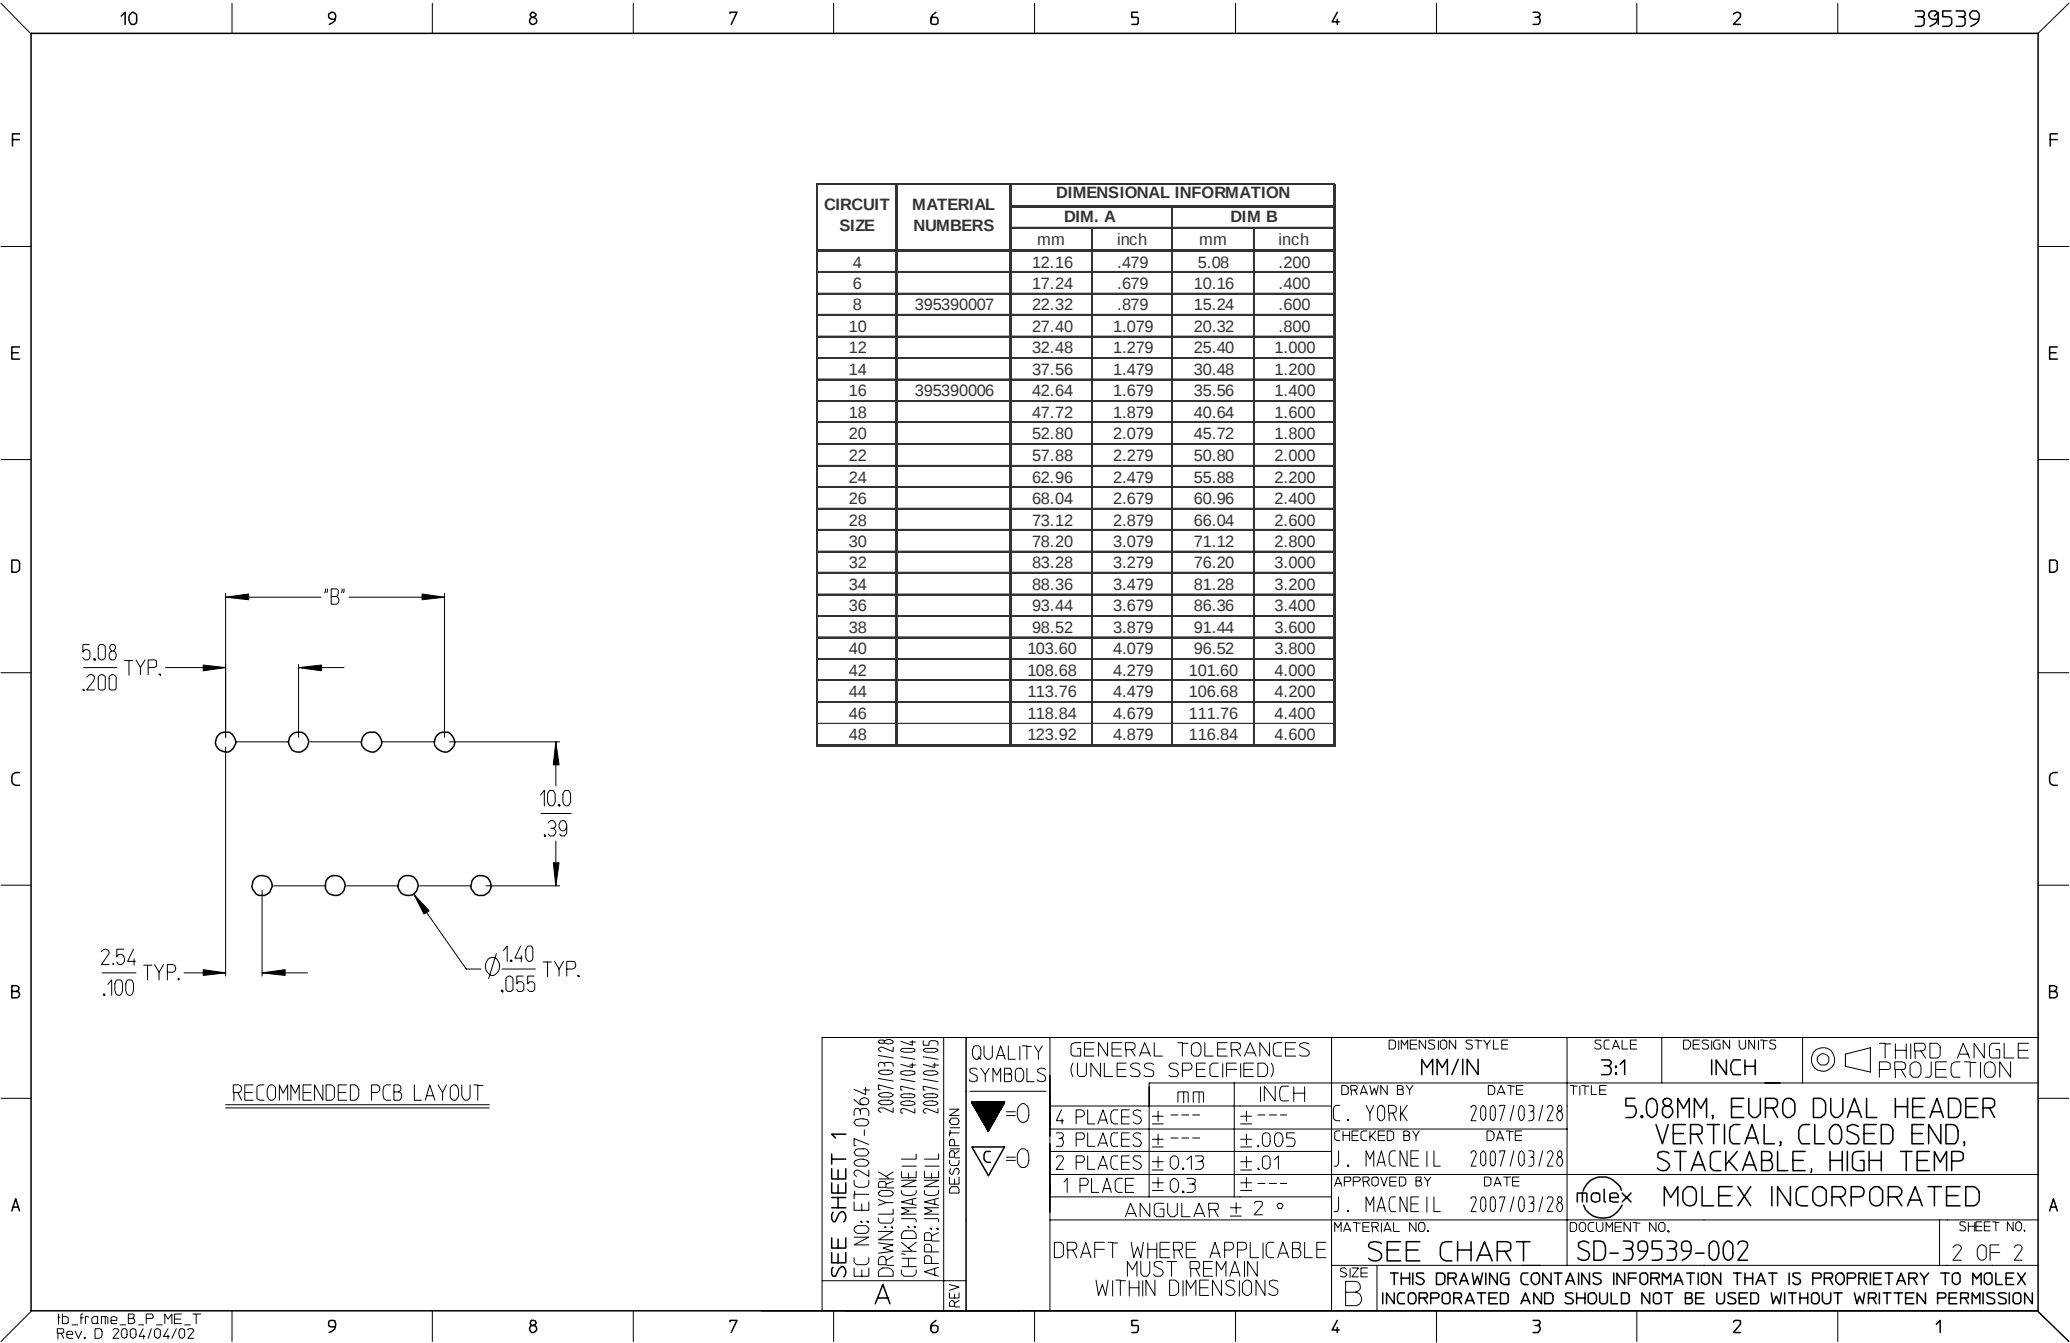

CIRCUIT SIZE	MATERIAL NUMBERS	DIMENSIONAL INFORMATION			
		DIM. A		DIM B	
		mm	inch	mm	inch
4		12.16	.479	5.08	.200
6		17.24	.679	10.16	.400
8	395390007	22.32	.879	15.24	.600
10		27.40	1.079	20.32	.800
12		32.48	1.279	25.40	1.000
14		37.56	1.479	30.48	1.200
16	395390006	42.64	1.679	35.56	1.400
18		47.72	1.879	40.64	1.600
20		52.80	2.079	45.72	1.800
22		57.88	2.279	50.80	2.000
24		62.96	2.479	55.88	2.200
26		68.04	2.679	60.96	2.400
28		73.12	2.879	66.04	2.600
30		78.20	3.079	71.12	2.800
32		83.28	3.279	76.20	3.000
34		88.36	3.479	81.28	3.200
36		93.44	3.679	86.36	3.400
38		98.52	3.879	91.44	3.600
40		103.60	4.079	96.52	3.800
42		108.68	4.279	101.60	4.000
44		113.76	4.479	106.68	4.200
46		118.84	4.679	111.76	4.400
48		123.92	4.879	116.84	4.600

SEE SHEET 1 EC NO: ETC2007-0364 DRAWN: C. YORK 2007/03/28 CHKD: J. MACNEIL 2007/04/04 APPR: J. MACNEIL 2007/04/05 A	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY C. YORK	DATE 2007/03/28	TITLE 5.08MM, EURO DUAL HEADER VERTICAL, CLOSED END, STACKABLE, HIGH TEMP	
			4 PLACES	± ---	± ---	CHECKED BY J. MACNEIL	DATE 2007/03/28		
			3 PLACES	± ---	± .005				
			2 PLACES	± .013	± .01				
			1 PLACE	± 0.3	± ---	APPROVED BY J. MACNEIL	DATE 2007/03/28	MOLEX MOLEX INCORPORATED	
			ANGULAR ± 2 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-39539-002		SHEET NO. 2 OF 2
REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					