



SAW Mobile Communications

Series/Type: **B7740**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39202B7740C810	B39202B9008E610	06.07.2007	31.01.2008	30.04.2008


For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.


Chip Sized SAW Package DCS4D
Features

- RF filter for mobile telephone PCS systems, receive path
- Low insertion loss, low amplitude ripple
- Usable passband 60 MHz
- Suitable for GPRS class 1 to 12
- Package for Surface Mounted Technology (SMT)

Terminals


- Gold-plated Ni

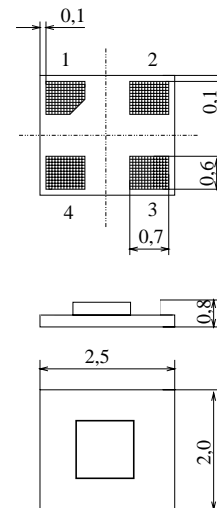

Dimensions in mm, approx. weight 0,012 g

Pin configuration

- | | |
|-----|--------|
| 1 | Input |
| 3 | Output |
| 2,4 | Ground |



Type	Ordering code	Marking and Package according to	Packing according to
B7740	B39202-B7740-C810	C61157-A7-A89	F61074-V8125-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	T	- 10/+ 80	°C	
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}	50	V	
Input Power at				
GSM850, GSM900	P_{IN}	15	dBm	peak power of GSM signal, duty cycle 4:8
GSM1800, GSM1900	P_{IN}	12	dBm	
tx bands				


Characteristics

Operating temperature range :	$T = 25\text{ °C} \pm 2\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,8	3,2	dB
1930,0... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,3	1,7	dB
1930,0... 1990,0 MHz					
Attenuation	α				
DC ... 1500,0 MHz		28	31	—	dB
1500,0.. 1830,0 MHz		25	29	—	dB
1830,0.. 1910,0 MHz		12	14	—	dB
2010,0... 2070,0 MHz		12	14	—	dB
2070,0... 2500,0 MHz		21	23	—	dB
2500,0... 3000,0 MHz		24	28	—	dB
3000,0... 4500,0 MHz		28	35	—	dB
4500,0... 5200,0 MHz		26	32	—	dB
5200,0... 6000,0 MHz		24	30	—	dB
Input vswr					
1930,0... 1990,0 MHz		---	2,2	2,3	
Output vswr					
1930,0... 1990,0 MHz		---	2,2	2,3	
Tx band suppression	α				
1830,0.. 1910,0 MHz		12	14	—	dB



Characteristics

Operating temperature range : $T = -10$ to $+80$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$


			min.	typ.	max.	
Center frequency	f_C		—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}					
1930,0... 1990,0 MHz			—	2,8	3,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
1930,0... 1990,0 MHz			—	1,3	1,7	dB
Attenuation	α					
DC ... 1500,0 MHz			28	31	—	dB
1500,0.. 1830,0 MHz			25	29	—	dB
1830,0.. 1910,0 MHz			10	13	—	dB
2010,0... 2070,0 MHz			10	13	—	dB
2070,0... 2500,0 MHz			21	23	—	dB
2500,0... 3000,0 MHz			24	28	—	dB
3000,0... 4500,0 MHz			28	35	—	dB
4500,0... 5200,0 MHz			26	32	—	dB
5200,0... 6000,0 MHz			24	30	—	dB
Input vswr						
1930,0... 1990,0 MHz			---	2,2	2,3	
Output vswr						
1930,0... 1990,0 MHz			---	2,2	2,3	
Tx band suppression	α					
1830,0.. 1910,0 MHz			10	13	—	dB



Transfer function
narrow band

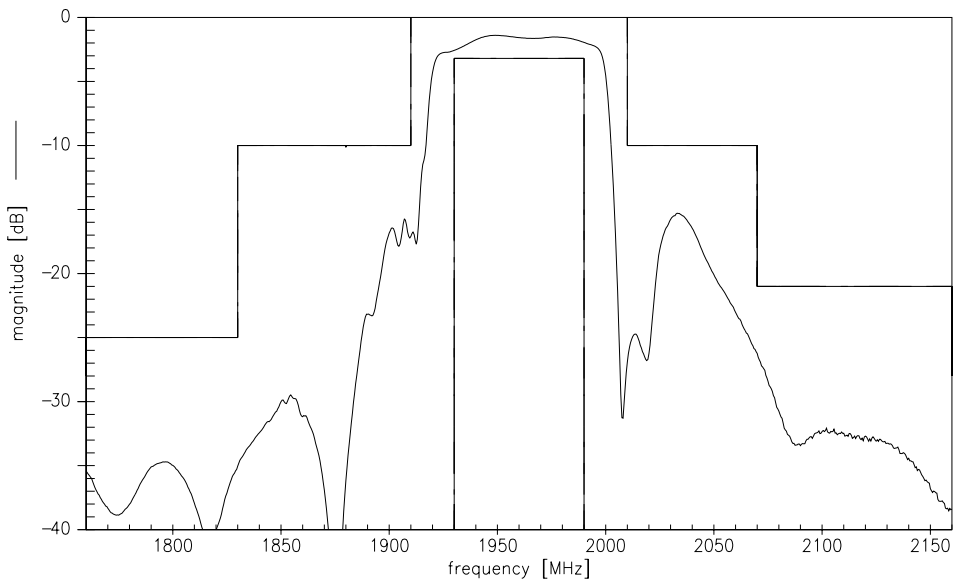



wide band

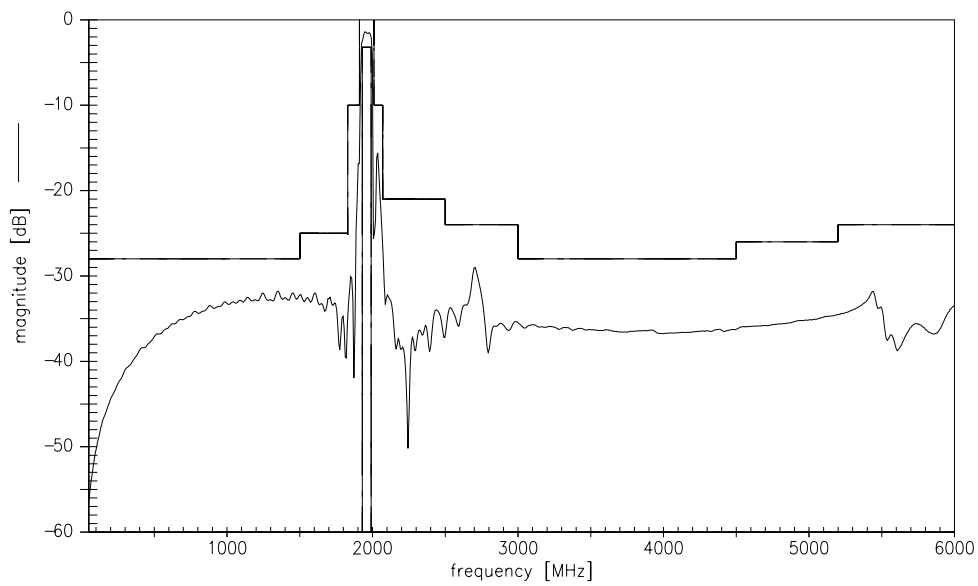





Reflection functions

S_{11}

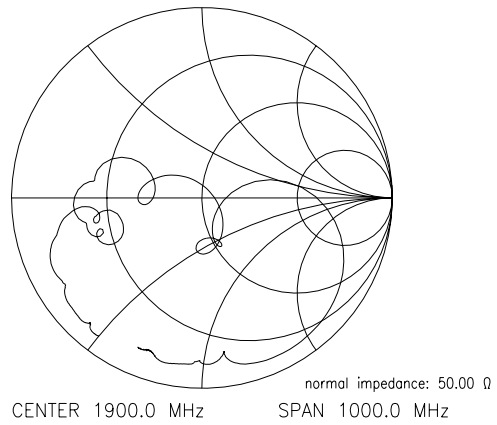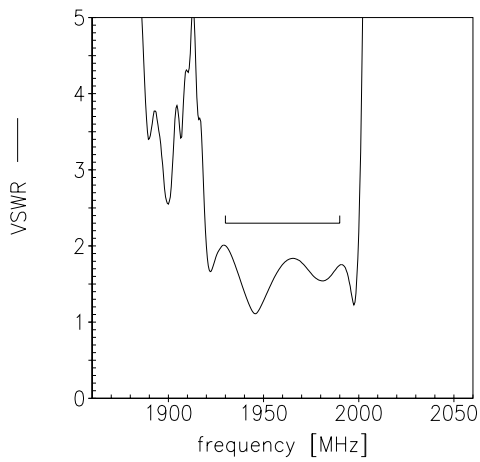

S_{22}

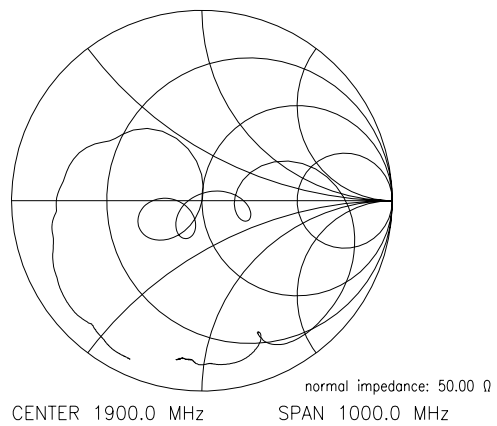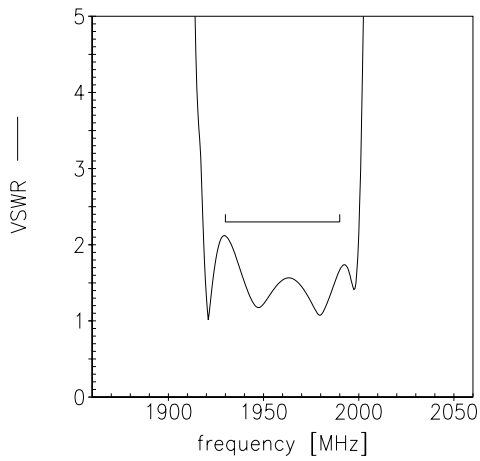

**Published by EPCOS AG****Surface Acoustic Wave Components Division, SAW MC WT****P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.