



SAW Components

Data Sheet B7803

Data Sheet


A large, stylized, 3D-rendered version of the EPCOS logo is shown in a dark, circular frame. The logo is rendered in a light, metallic-looking color and is tilted diagonally. The word "EPCOS" is written in a bold, sans-serif font, with the letters appearing to be part of a curved surface. The background of the frame is dark and textured, suggesting a globe or a complex circuit board.

Features

- Low-loss RF filter for W-CDMA system, transmit path
- Usable passband 60 MHz
- No matching network required for operation at 50 Ω
- Ceramic package for **Surface Mounted** technology (**SMT**)

Terminals


- Ni, gold-plated

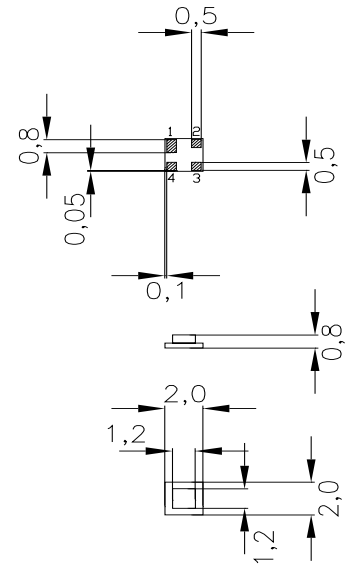

Dimensions in mm, approx. weight 0,019 g

Pin configuration

2	Input
1	Input - ground
3	Output
4	Output - ground

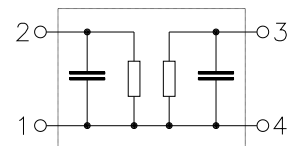

Type	Ordering code	Marking and Package according to	Packing according to
B7803	B39202-B7803-A510	C61157-A7-A63	F61074-V8099-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	- 20/+ 85	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	source impedance 50 Ω

Data Sheet

Characteristics

Operating temperature range: $T = 25^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1950,0	—	MHz
Maximum insertion attenuation	α_{\max}		—	2,3	2,5	dB
		1920,0 ... 1980,0 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$		—	0,5	0,7	dB
		1920,0 ... 1980,0 MHz				
Amplitude ripple (p-p) per 5-MHz channel	$\Delta\alpha_{\text{ch}}$		—	0,2	0,4	dB
		1920,0 ... 1980,0 MHz				
Input VSWR			—	1,8	2,0	
		1920,0 ... 1980,0 MHz				
Output VSWR			—	1,8	2,0	
		1920,0 ... 1980,0 MHz				
Attenuation	α					
		50,0 ... 1805,0 MHz	17,0	18,0	—	dB
		1805,0 ... 1880,0 MHz	17,0	20,0	—	dB
		2110,0 ... 2170,0 MHz	31,0	35,0	—	dB
		2170,0 ... 2500,0 MHz	25,0	27,0	—	dB
		2500,0 ... 2800,0 MHz	20,0	23,0	—	dB
		2800,0 ... 6000,0 MHz	12,0	15,0	—	dB

Data Sheet

Characteristics


Operating temperature range: $T = -20$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency		f_c		—	1950,0	—	MHz
Maximum insertion attenuation	1920,0 ...1980,0	MHz	α_{\max}	—	2,5	2,8	dB
Amplitude ripple (p-p)	1920,0 ...1980,0	MHz	$\Delta\alpha$	—	0,7	1,0	dB
Amplitude ripple (p-p) per 5-MHz channel	1920,0 ...1980,0	MHz	$\Delta\alpha_{\text{ch}}$	—	0,4	0,5	dB
Input VSWR	1920,0 ...1980,0	MHz		—	1,8	2,0	
Output VSWR	1920,0 ...1980,0	MHz		—	1,8	2,0	
Attenuation			α				
	50,0 ...1805,0	MHz		17,0	18,0	—	dB
	1805,0 ...1880,0	MHz		17,0	20,0	—	dB
	2110,0 ...2170,0	MHz		31,0	35,0	—	dB
	2170,0 ...2500,0	MHz		25,0	27,0	—	dB
	2500,0 ...2800,0	MHz		20,0	23,0	—	dB
	2800,0 ...6000,0	MHz		12,0	15,0	—	dB


Data Sheet



Frequency response (narrow band)

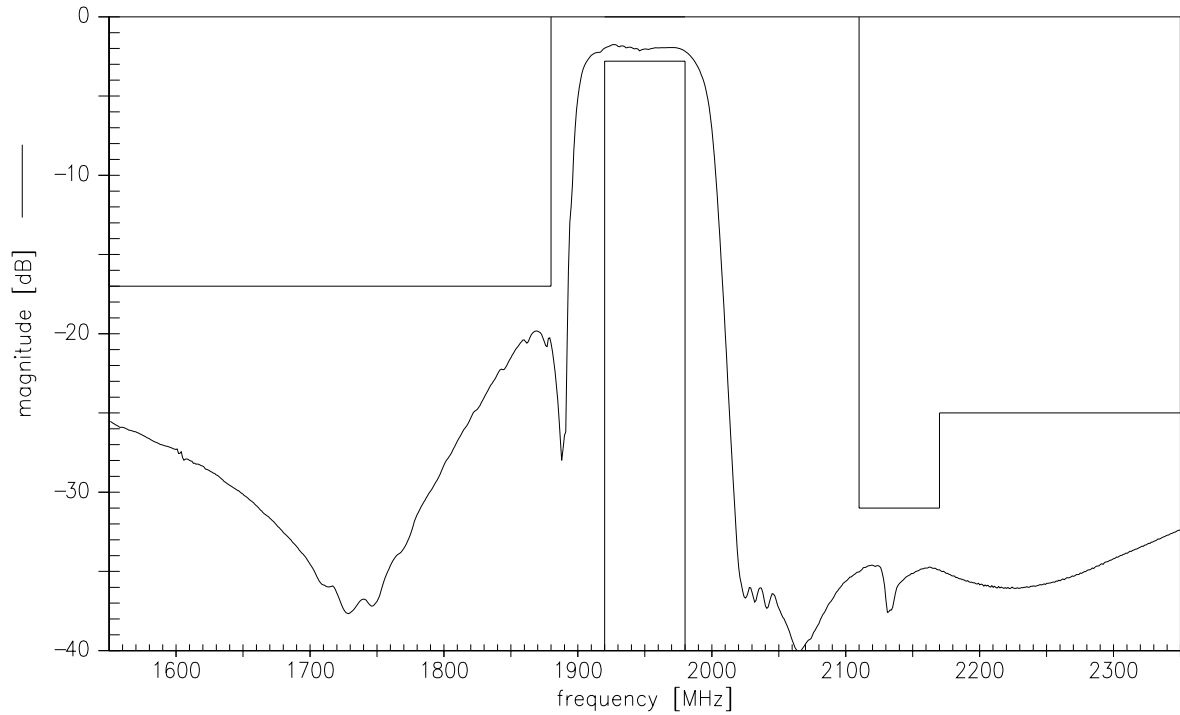

Frequency response (broad band)

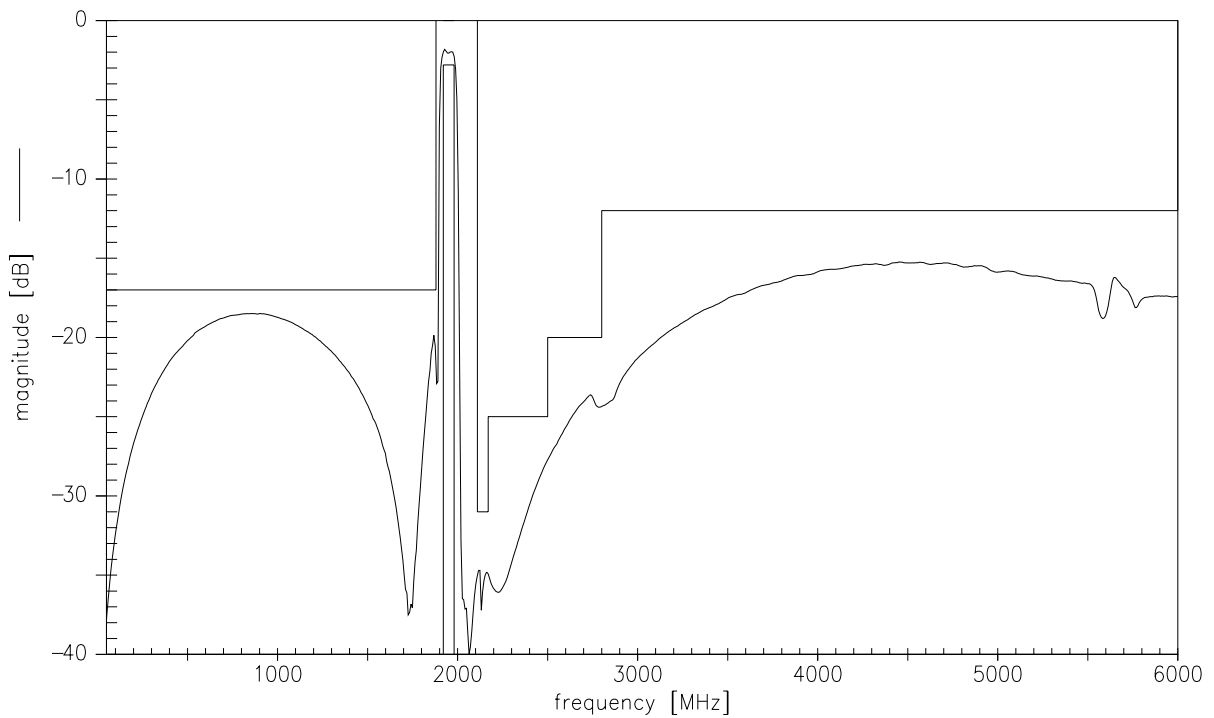



Published by EPCOS AG

**Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2002. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.