



# SAW Components

Data Sheet M 3568 M





## SAW Components

M 3568 M

## IF Filter for Quasi/Split Sound Applications

45,75 MHz

### Data Sheet

#### Standard

Plastic package **SIP5K**

- M/N

#### Features

- TV IF filter for quasi/split sound applications (separate picture and sound channel)
- Picture channel with Nyquist slope and sound suppression, symmetrical output
- Customized group delay predistortion
- Sound channel with passband for sound carrier only

#### Terminals


- Tinned CuFe alloy



Dimensions in mm, approx. weight 1,0 g

#### Pin configuration

- |   |                       |
|---|-----------------------|
| 1 | Input                 |
| 2 | Chip carrier - ground |
| 3 | Output - sound        |
| 4 | Output - picture      |
| 5 | Output - picture      |

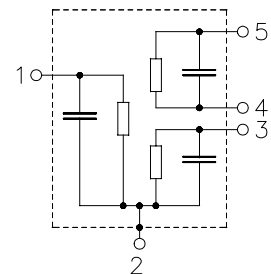

Type	Ordering code	Marking and package according to	Packing according to
M 3568 M	B39458-M3568-M201	C61157-A1-A15	F61074-V8067-Z000

#### Maximum ratings

Operable temperature range	$T_A$	-25/+65	°C	between any terminals between any terminals
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	
AC voltage	$V_{pp}$	10	V	



# SAW Components

M 3568 M

## IF Filter for Quasi/Split Sound Applications

45,75 MHz

### Data Sheet

#### Characteristics of picture channel

Reference temperature:  $T_A = 25 (45) ^\circ \text{C}$   
Terminating source impedance:  $Z_S = 50 \Omega$   
Terminating load impedance:  $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>	$\alpha$				
Reference level for the following data	44,06 (44,00) MHz	12,3	13,8	15,3	dB
<b>Relative attenuation</b>	$\alpha_{\text{rel}}$				
Picture carrier	45,81 (45,75) MHz	4,9	5,9	6,9	dB
Color carrier	42,23 (42,17) MHz	1,4	2,4	3,4	dB
Sound carrier	41,31 (41,25) MHz	34,0	43,0	—	dB
Adjacent picture carrier	39,81 (39,75) MHz	50,0	65,0	—	dB
Adjacent sound carrier	47,31 (47,25) MHz	42,0	52,0	—	dB
Lower sidelobe	35,06 ... 39,81 (35,00 ... 39,75) MHz	41,0	45,0	—	dB
Upper sidelobe	47,31 ... 55,06 (47,25 ... 55,00) MHz	36,0	42,0	—	dB
<b>Reflected wave signal suppression</b>					
1,2 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		42,0	52,0	—	dB
<b>Feedthrough signal suppression</b>					
1,3 $\mu\text{s}$ ... 1,2 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		50,0	56,0	—	dB
<b>Group delay predistortion</b>	$\Delta\tau$				
(reference frequency 45,75 MHz)					
	42,23 (42,17) MHz	—	50	—	ns
<b>Group delay ripple (p-p)</b>					
	43,06 ... 45,81 (43,00 ... 45,75) MHz $\Delta\tau$	—	40	—	ns
<b>Impedance at 44,06 MHz</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,1 $\parallel$ 19,1	—	k $\Omega$ $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,6 $\parallel$ 3,1	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



# SAW Components

M 3568 M

## IF Filter for Quasi/Split Sound Applications

45,75 MHz

### Data Sheet

#### Characteristics of sound channel

Reference temperature:  $T_A = 25 (45) ^\circ \text{C}$   
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>	$\alpha$				
Reference level for the following data	41,31 (41,25) MHz	10,2	11,7	13,2	dB
<b>Relative attenuation</b>	$\alpha_{\text{rel}}$				
Picture carrier	45,81 (45,75) MHz	38,0	50,0	—	dB
Color carrier	42,23 (42,17) MHz	13,0	16,0	—	dB
Adjacent picture carrier	39,81 (39,75) MHz	32,0	37,0	—	dB
Adjacent sound carrier	47,31 (47,25) MHz	40,0	50,0	—	dB
Lower sidelobe	35,06 ... 39,81 (35,00 ... 39,75) MHz	32,0	40,0	—	dB
Upper sidelobe	47,31 ... 55,06 (47,25 ... 55,00) MHz	38,0	42,0	—	dB
<b>Impedance</b> at 41,31 MHz					
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	3,3 $\parallel$ 2,6	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



# SAW Components



M 3568 M

## IF Filter for Quasi/Split Sound Applications

45,75 MHz

### Data Sheet

#### Frequency response of picture channel

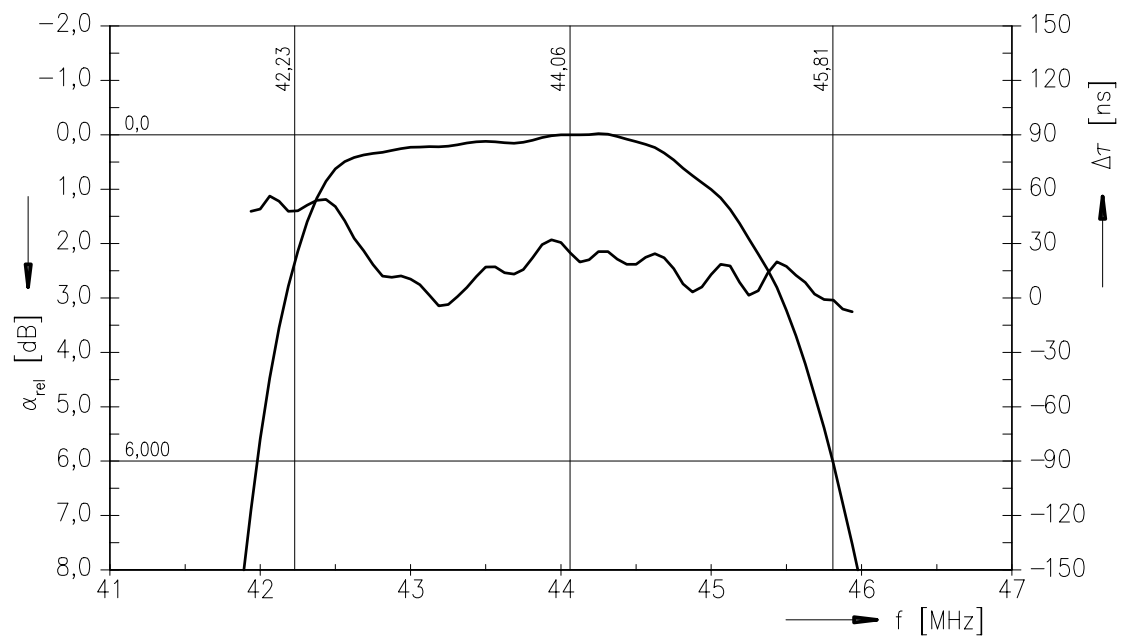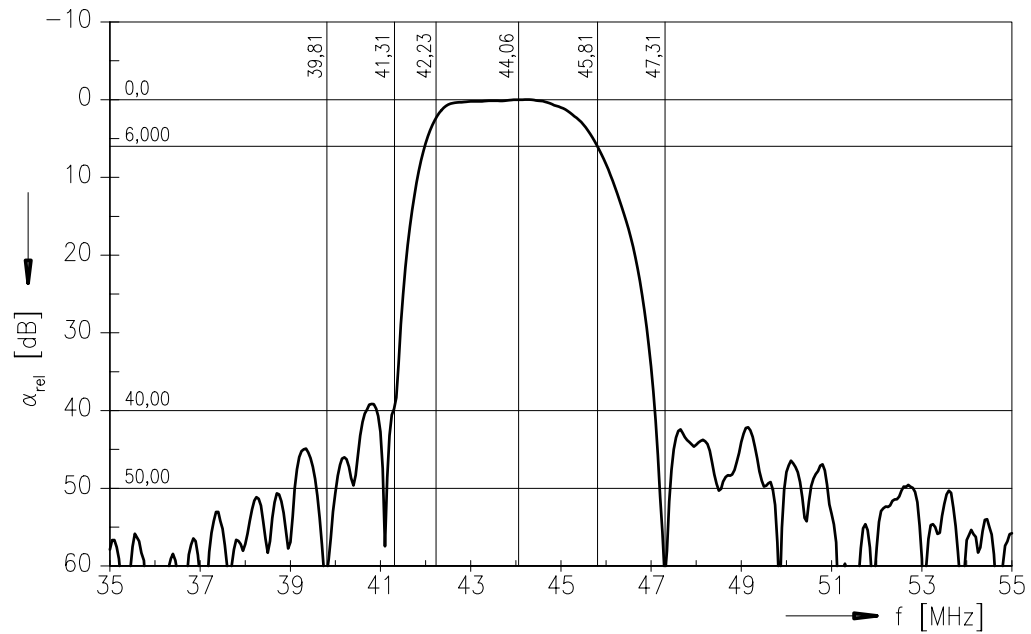



SAW Components


M 3568 M

IF Filter for Quasi/Split Sound Applications


45,75 MHz

## Data Sheet

### Frequency response of picture channel

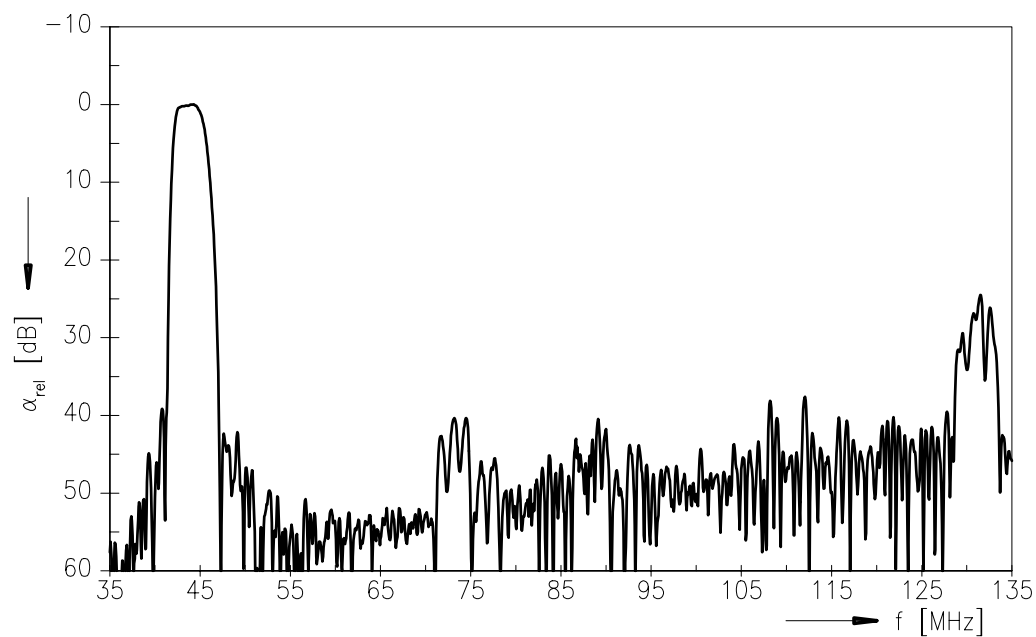

### Time domain response of picture channel

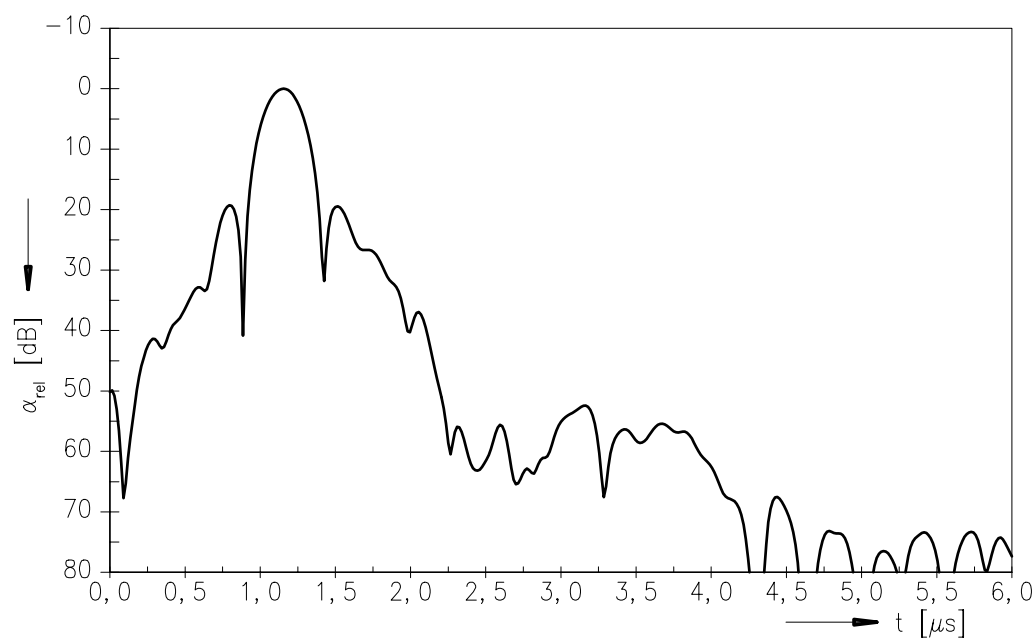



SAW Components


M 3568 M

IF Filter for Quasi/Split Sound Applications

45,75 MHz

Data Sheet

Frequency response of sound channel

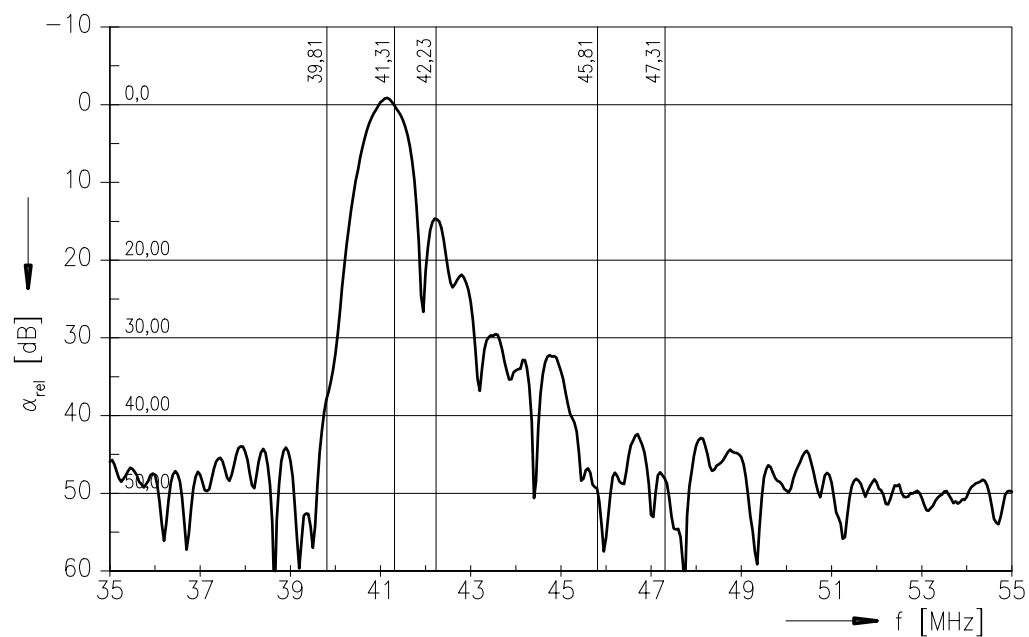



<b>SAW Components</b>	<b>M 3568 M</b>
<b>IF Filter for Quasi/Split Sound Applications</b>	<b>45,75 MHz</b>

#### Data Sheet

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW CE MM PD**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.