

# SAW Components

Data Sheet M 9260 M





## SAW Components M 9260 M IF Filter for Audio Applications 45,75 MHz

**Data Sheet** 

#### Standard

■ M/N

#### **Features**


■ TV IF audio filter with pass bands for picture carrier at 45,75 MHz and sound carrier at 41,25 MHz

#### **Terminals**

■ Tinned CuFe alloy

#### Plastic package SIP5K






Dimensions in mm, approx. weight 1,0 g

#### Pin configuration

- 1 Input
- 2 Input ground
- 3 Chip carrier ground
- 4 Output
- 5 Output



Туре	Ordering code	Marking and package according to	Packing according to		
M 9260 M	B39458-M9260-M100	C61157-A1-A15	F61074-V8067-Z000		

### **Maximum ratings**

Operable temperature range	$T_{A}$	-25/+65	°C	
Storage temperature range	$T_{\rm stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{\sf pp}$	10	V	between any terminals



SAW Components M 9260 M

#### **IF Filter for Audio Applications**

45,75 MHz

**Data Sheet** 

Characteristics

 $T_{A} = 25 \,^{\circ}\text{C}$   $Z_{S} = 50 \,\Omega$   $Z_{L} = 2 \,\text{k}\Omega \parallel 3 \,\text{pF}$ Reference temperature: Terminating source impedance:

Terminating load impedance:

				min.	typ.	max.			
Insertion attenuation									
Reference level for the 41,25 MHz		MHz		12,6	14,1	15,6	dB		
following data									
Relative attenuation			$\alpha_{rel}$						
Picture carrier 45,75 MHz		MHz		-0,6	0,4	1,4	dB		
Color carrier 42,17 MHz				22,0	28,0	_	dB		
Adjacent picture carrier 39,75 MHz				42,0	50,0	_	dB		
Adjacent sound carrier 47,25 MHz				40,0	48,0	_	dB		
Lower sidelobe	35,00 39,75	MHz		40,0	46,0	_	dB		
Upper sidelobe	47,25 55,00	MHz		36,0	42,0	_	dB		
Impedance at 41,25 MHz									
Input:	$Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$	١		_	0,4    9,5	_	$k\Omega \parallel pF$		
Output: $Z_{OUT} = R_{OUT}    C_{OUT}$				_	3,3    6,3	_	k $\Omega \parallel pF$		
Temperature coefficient of frequency			$TC_{f}$	_	-72	_	ppm/K		



SAW Components


M 9260 M


**IF Filter for Audio Applications** 

45,75 MHz

**Data Sheet** 

#### Frequency response

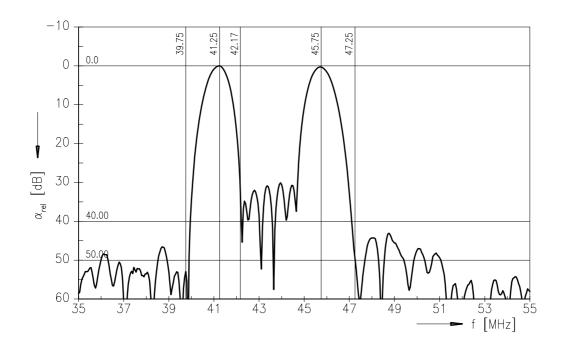

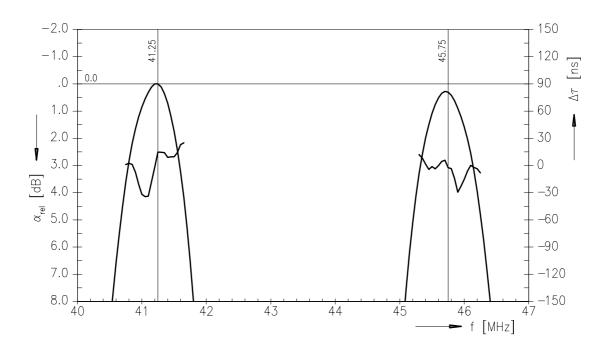



SAW Components M 9260 M

**IF Filter for Audio Applications** 

45,75 MHz

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW CE MM PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.