

# SAW Components

Data Sheet N 9260 M





## SAW ComponentsN 9260 MIF Filter for Audio Applications58,75 MHz

#### Data Sheet

#### Standard

Plastic package SIP5K


M

#### Features

■ TV IF audio filter with pass bands for picture carrier and sound carrier at 54,25 MHz

#### Terminals

■ Tinned CuFe alloy




. . . . .

Dimensions in mm, approx. weight 1,0 g

### **Pin configuration**

- 1 Input
- 2 Input ground
- 3 Chip carrier ground
- 4 Output
- 5 Output



Туре	Ordering code	Marking and package according to	Packing according to		
N 9260 M	B39588-N9260-M100	C61157-A1-A15	F61074-V8067-Z000		

#### **Maximum ratings**

Operable temperature range	T <sub>A</sub>	-25/+65	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5	V	between any terminals
AC voltage	$V_{\rm pp}$	10	V	between any terminals

2




SAW Components N 9260 N				9260 M		
IF Filter for Audio App	olications				58,7	′5 MHz
Data Sheet						
Characteristics						
Reference temperature: Terminating source impeda Terminating load impedan	ance: Z	$F_{A} = 25 (4)$ $F_{S} = 50 \Omega$ $F_{L} = 2 k\Omega$				
			min.	typ.	max.	
Insertion attenuation		α				
Reference level for the following data	58,83 (58,75) Mł	Ηz	18,6	20,1	21,6	dB
Relative attenuation		$\alpha_{rel}$				
Sound carrier	54,33 (54,25) Mł	Ηz	-1,5	-0,5	0,5	dB
Color carrier	55,25 (55,17) Mł	Ηz	20,0	30,0	_	dB
Adjacent picture carrier	52,83 (52,75) Mł	Ηz	40,0	50,0	_	dB
Adjacent sound carrier Lower sidelobe	60,33 (60,25) Mł	Ηz	29,0	37,0	—	dB
45,08 52,83	(45,00 52,75) Mł	Ηz	36,0	44,0		dB
Upper sidelobe						
60,33 65,08	(60,25 65,00) Mł	Ηz	28,0	34,0	—	dB
Impedance at 58,83 MHz						
Input: Z	$C_{\rm IN} = R_{\rm IN}    C_{\rm IN}$		-	1,3    10,2	—	kΩ    pF
Output: Z	$C_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		_	3,3    1,5	—	kΩ    pF
Temperature coefficient	of frequency	TC <sub>f</sub>	—	-72	_	ppm/K




SAW Components	N 9260 M
IF Filter for Audio Applications	58,75 MHz

Data Sheet

Frequency response

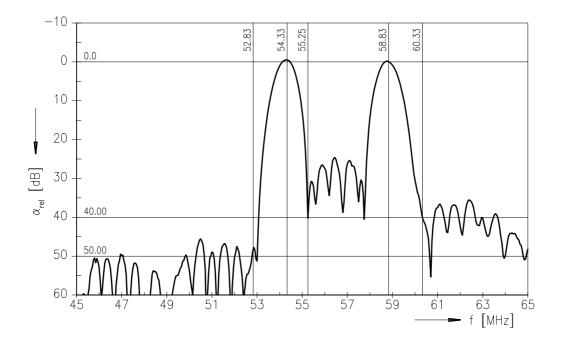

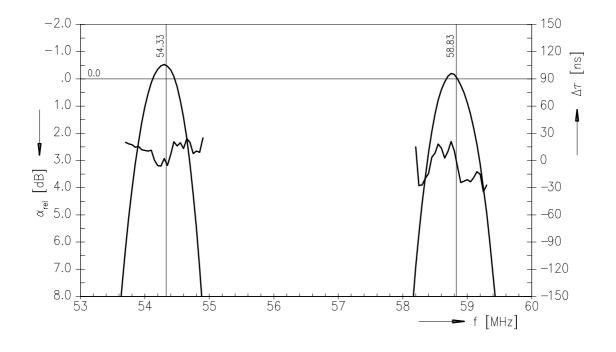

4



SAW Components	N 9260 M
IF Filter for Audio Applications	58,75 MHz

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW CE MM PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.



Mar 31, 2006