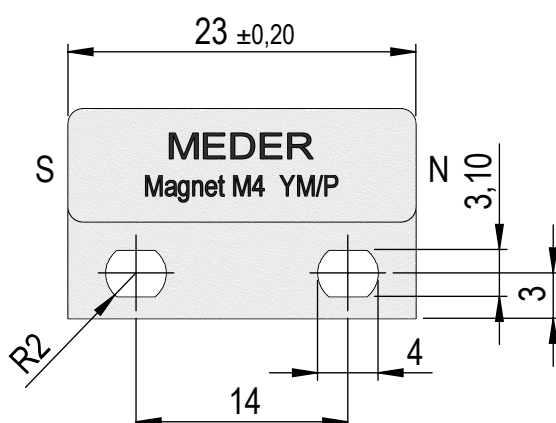



Description		Article No.	Material
Housing	M4 housing , white	3005001022	PBT GF reinforced
Potting compound	Polyurethane		
Magnet	Round magnet	4003004003	AINiCo 500 35/5
	Min.	Typ.	Max.
Magnetic moment (MS150)	19,8	22,2	
Operating temperature	-20		80
Remarks	magnetization axial		
Protection class	N/A		
Mounting:	screws M3 ISO 1207, slice ISO 7089		
max. Torque	0,5	Nm	

Application					Tolerance		Surface	Scale: 2:1		Weight:		
					DIN ISO 2768-m			Material: ---				
					created:	13.12.2010	wkovacs	MAGNET M04				
					checked:	22.12.2017	mreizner					
					Sheet size:	A4						
					dimensions in:	mm						
					StandexMeder Electronics GmbH Robert-Bosch-Str.4 78224 Singen Tel.:+49(0)7731/8399-0 Fax:+49(0)7731/8399-30							Art.Nr./DrawingNr. 2500000004
								Tool Nr.			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF StandexMeder Electronics GmbH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF StandexMeder Electronics GmbH IS PROHIBITED.	
								www.standexmeder.com				
01		issued in swx, previous versions archived in Navision	21.12.2017	w.k.							page 1	
Rev.	state	change	date	name				of 1				