


PCMCIA PC Memory Card Connectors




Series 5025 Product Selection Guide

CONNECTOR

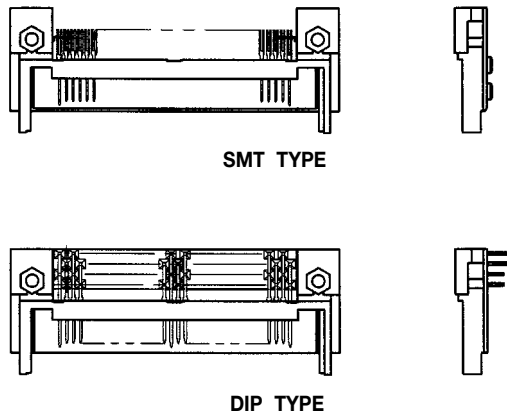

EJECTOR

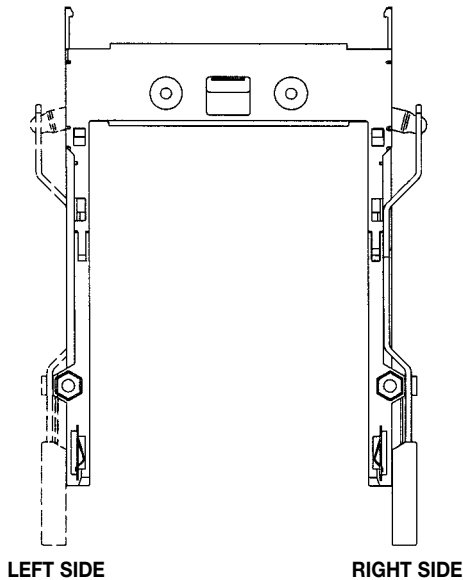

SINGLE SMT

Connector Style			Ejector Style	How To Order		Page
Stand Off	Voltage	Keying	Button Side	Connector	Ejector	
Height=0	5v	Normal	Left	31 5025 068 305 871	30 5025 000 321 000	6, 7
			Right	31 5025 068 305 871	30 5025 000 322 000	
Height=0	5v	Reverse	Left	31 5025 068 355 871	30 5025 000 321 000	6, 7
			Right	31 5025 068 355 871	30 5025 000 322 000	

SINGLE DIP

Connector Style			Ejector Style	How To Order		Page
Stand Off	Voltage	Keying	Button Side	Connector	Ejector	
Height=0	5v	Normal	Left	31 5025 068 100 871	30 5025 000 321 000	8, 9
			Right	31 5025 068 100 871	30 5025 000 322 000	
Height=0	5v	Reverse	Left	31 5025 068 150 871	30 5025 000 321 000	8, 9
			Right	31 5025 068 150 871	30 5025 000 322 000	


Note – If drawings are required then please contact your local sales office.

PCMCIA PC Memory Card Connectors



Series 5025 Product Selection Guide

SERIES 5025

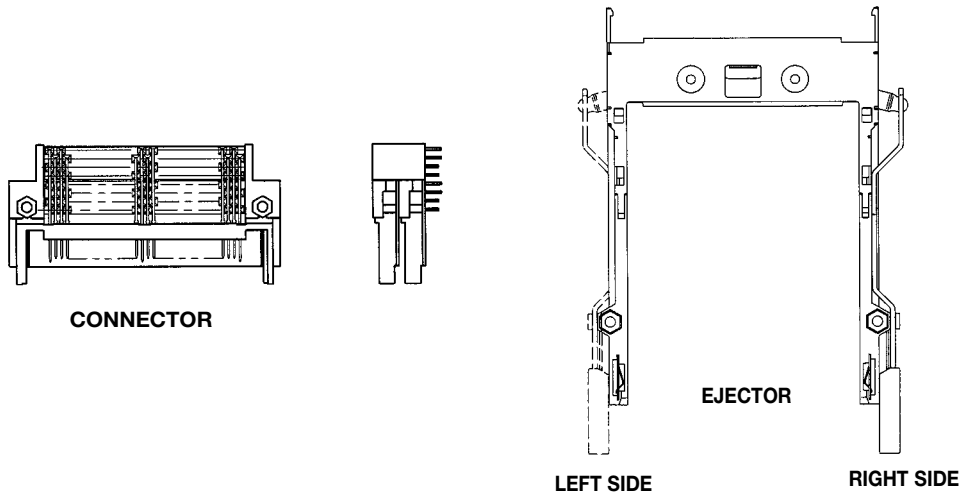

DUAL DIP/DIP

Connector Style			Ejector Style	Assembly Number	How To Order	Page
Stand Off	Voltage	Keying	Button Side	Connector	Ejector	
Height=0	5v	Normal	Left/Left	31 5025 136 500 871	30 5025 000 621 000	10, 11
			Right/Right	31 5025 136 500 871	30 5025 000 622 000	
			Left/Right	31 5025 136 500 871	30 5025 000 623 000	
			Right/Left	31 5025 136 500 871	30 5025 000 624 000	
Height=0	5v	Reverse	Left/Left	31 5025 136 550 871	30 5025 000 621 000	10, 11
			Right/Right	31 5025 136 550 871	30 5025 000 622 000	
			Left/Right	31 5025 136 550 871	30 5025 000 623 000	
			Right/Left	31 5025 136 550 871	30 5025 000 624 000	

Note – If drawings are required then please contact your local sales office.

Assembly number for connector above comprises of a lower and upper header that needs to be ordered separately. See below on How To Order.


Assembly Number	Header Type	How To Order	Page
31 5025 136 500 871	Upper Header	31 5025 068 200 871	10, 11
	Lower Header	31 5025 068 100 871	
31 5025 136 550 871	Upper Header	31 5025 068 250 871	10, 11
	Lower Header	31 5025 068 150 871	

PCMCIA PC Memory Card Connectors



Series 5025 SMT SINGLE Header/Ejector Assembly


CONNECTOR

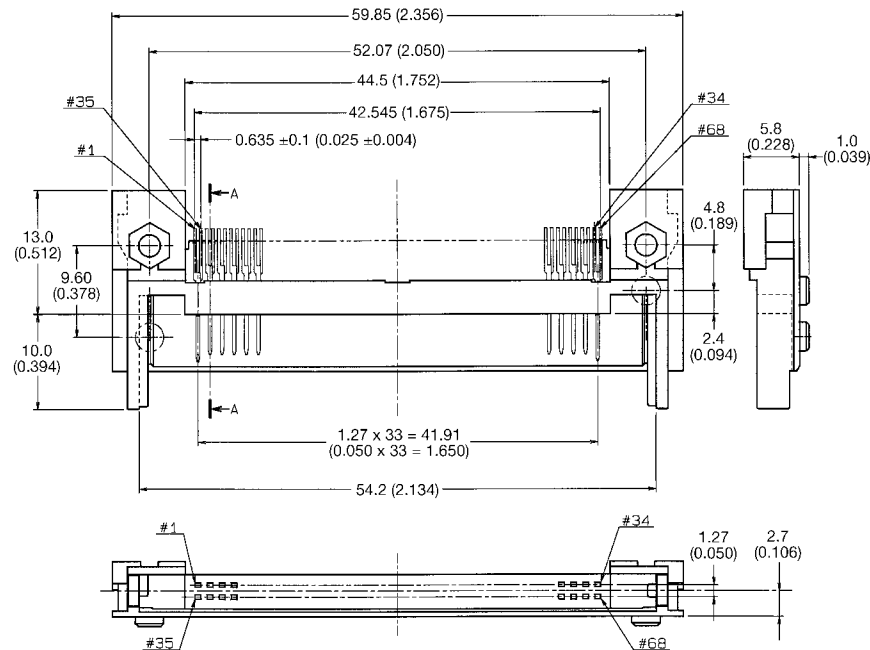

HOW TO ORDER

31 5025 068 305 871

EJECTOR

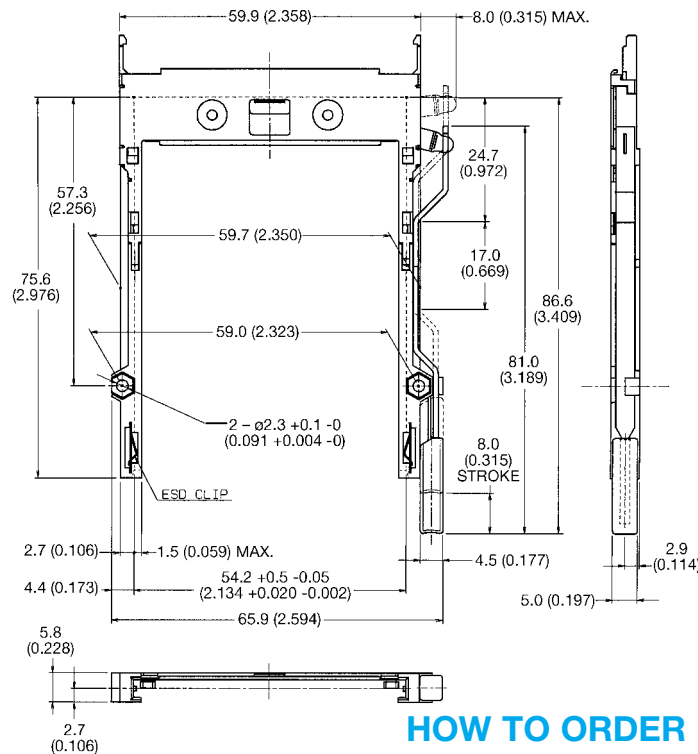

HOW TO ORDER

30 5025 000 322 000

Variation Code
See page 4


Variation Code
See page 4

PCMCIA PC Memory Card Connectors



Series 5025 SMT SINGLE Header/Ejector Assembly


ASSEMBLY

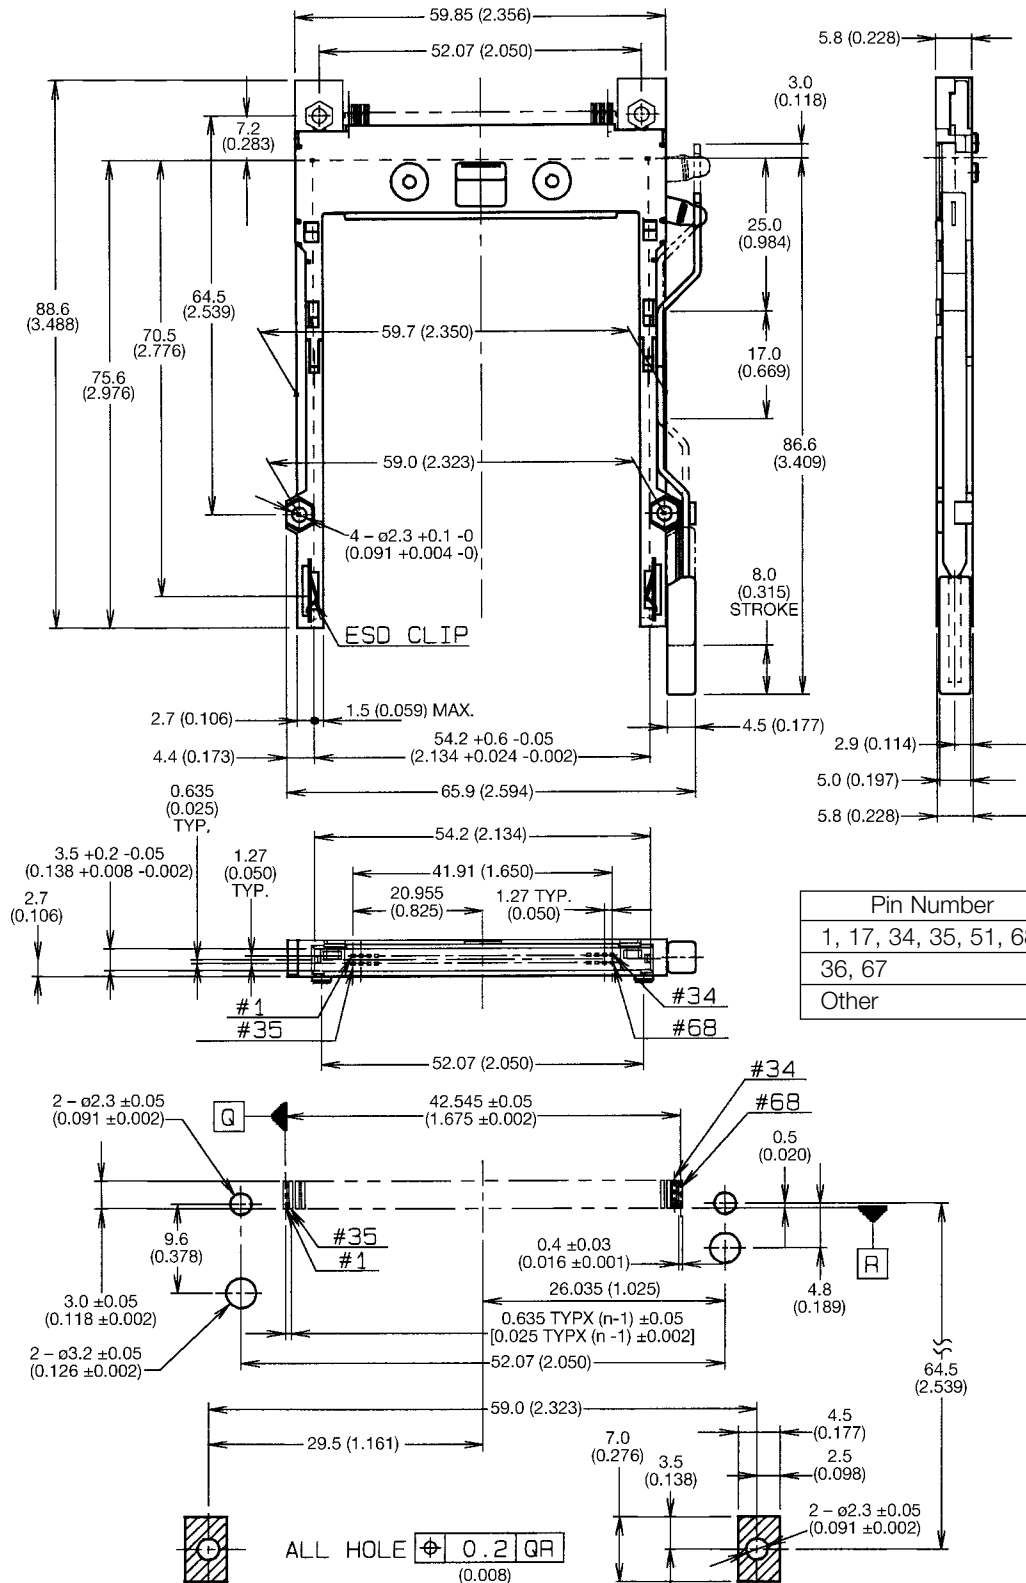

See page 4 for How To Order

ELCO

ASSEMBLY



PCMCIA PC Memory Card Connectors





Series 5025 DIP DUAL Header/Ejector Assembly

CONNECTOR

LOWER

UPPER

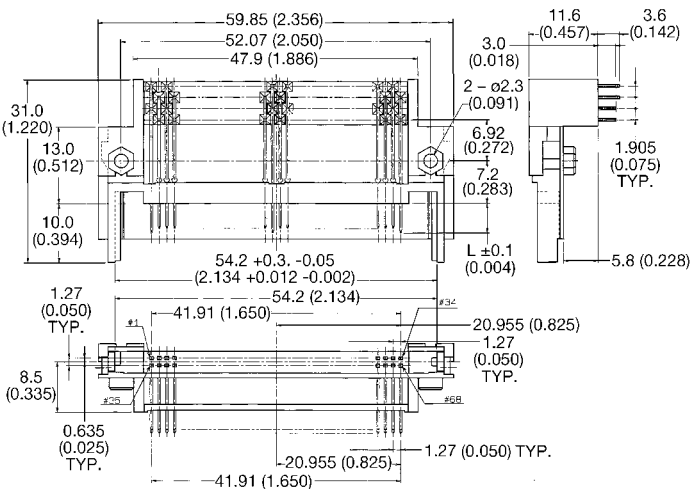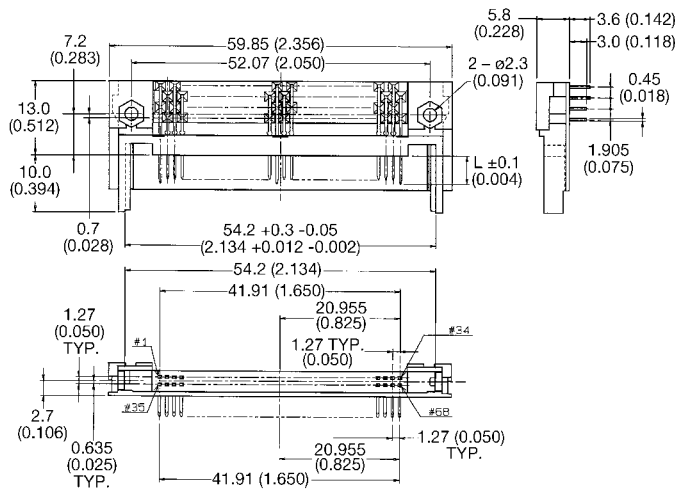


ASSEMBLY NUMBER

31 5025 136 5X0 871

Variation Code

See page 5
500 = Normal
550 = Reverse

EJECTOR

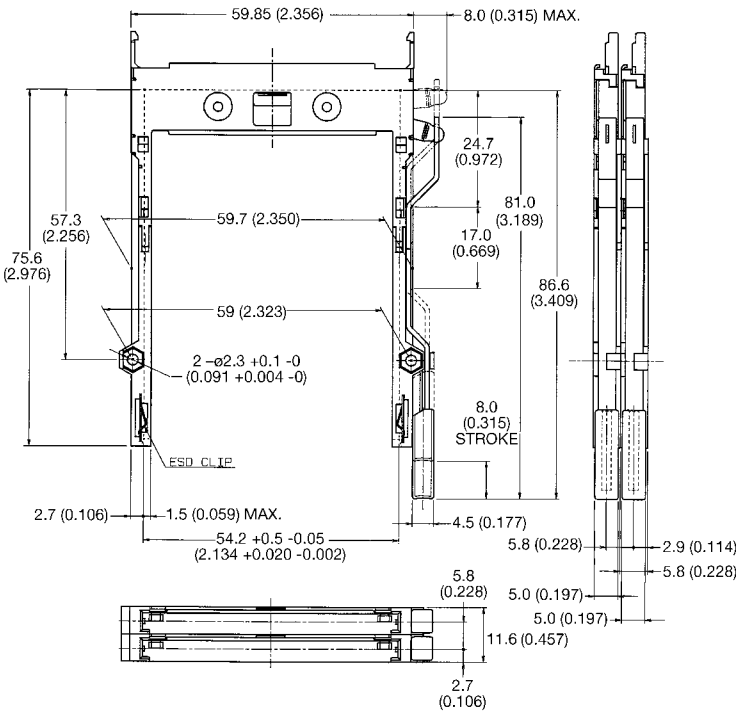


HOW TO ORDER

30 5025 000 622 000

Variation Code
See page 5

ASSEMBLY





PCMCIA PC Memory Card Connectors





Series 5069 Product Selection Guide

SERIES 5069

SINGLE SIDE

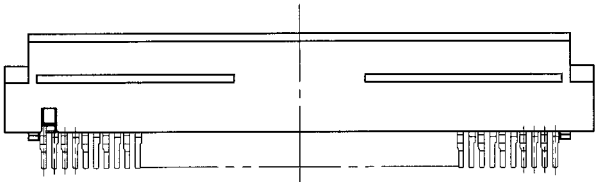

STRADDLE TAIL

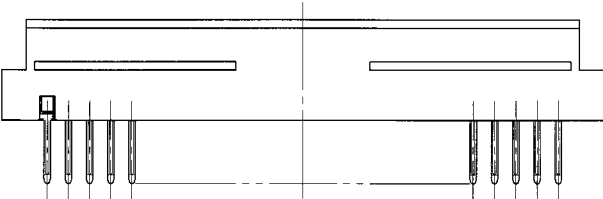



Solder Tail Style	How To Order	Packaging		
		Semi-Hard Tray	70 Tray	840 Box
Straddle Mount	20 5069 068 003 871			
Single Side	24 5069 068 901 835	Tape and Reel	1000 Tape and Reel	

PCMCIA PC Memory Card Connectors



Series 5069 Receptacle Connectors

SINGLE SIDE

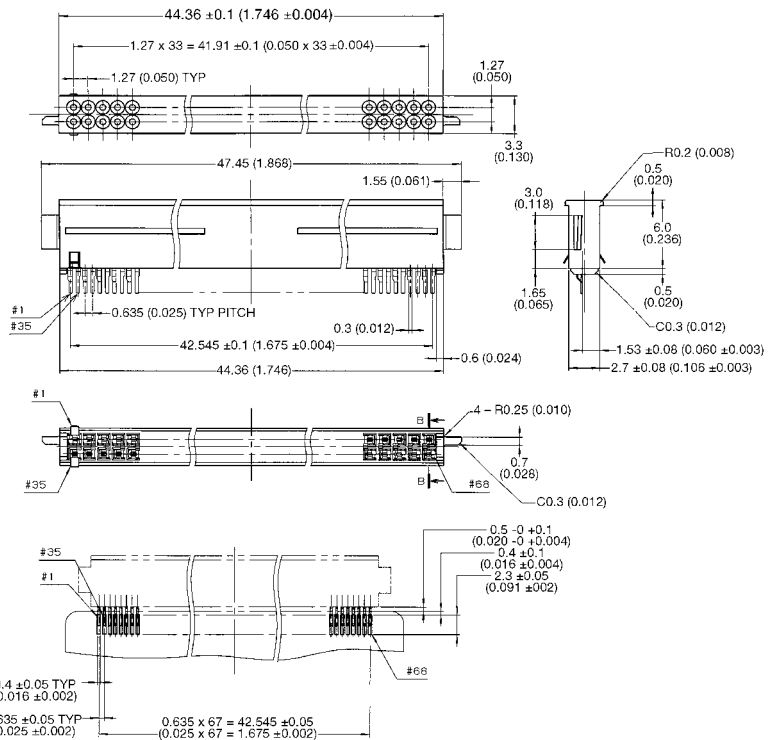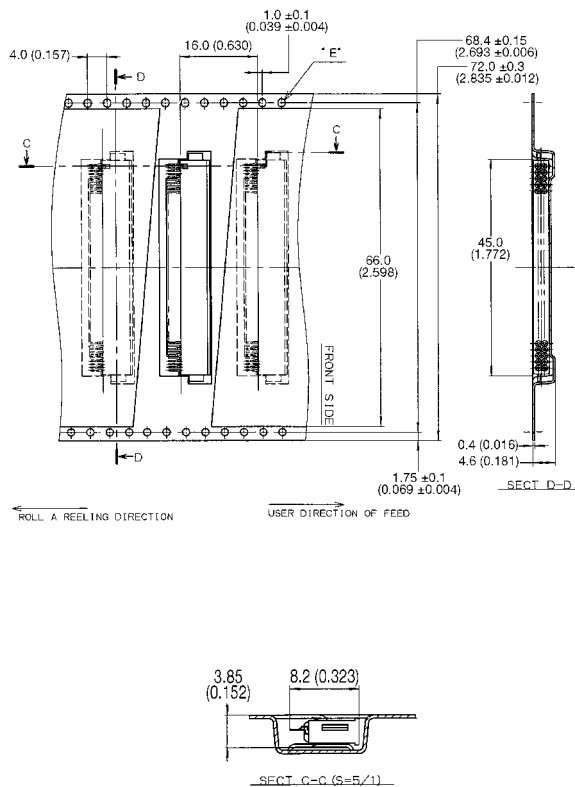


RECOMMENDED PCB PATTERN

HOW TO ORDER

24 5069 068 901 835

STRADDLE

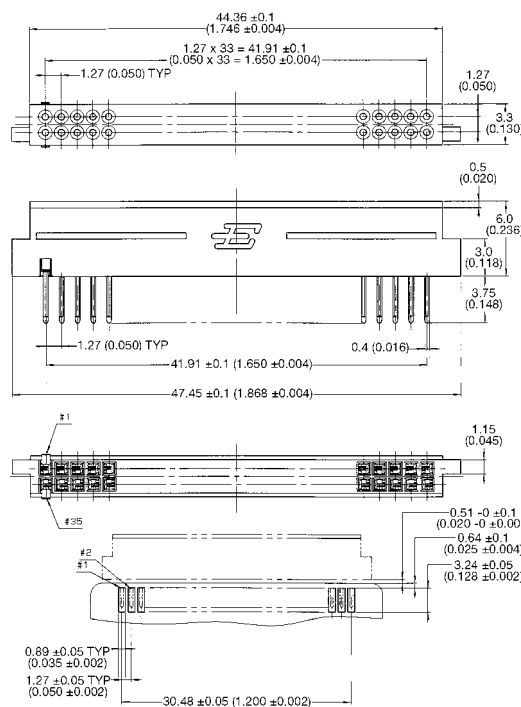

RECOMMENDED PCB PATTERN

HOW TO ORDER

20 5069 068 003 871

840 per Box

ELCO