



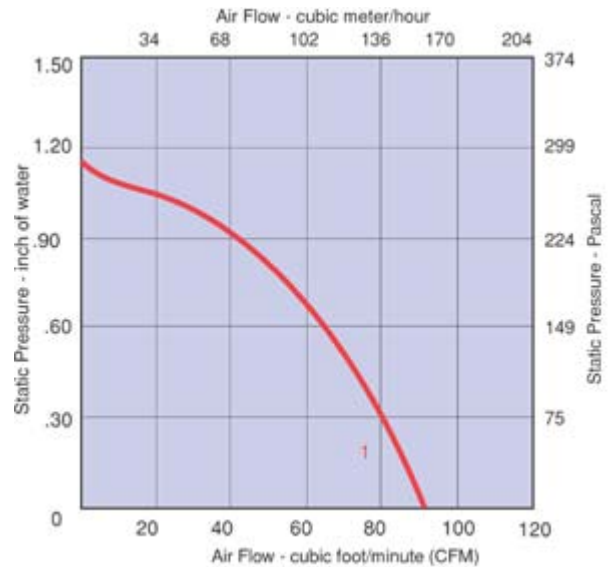

## RER101 Series Motorized Impeller

Part Number	CFM @ 0	Curve	Volts	Voltage Range	Power (W)	Power (W) dBA	Max Ambient Temp C	Wgt. (lbs)	Type Of Bearing	Features
RER101-36/12/12P	90	1	12	11 to 13	13.5	69	55	0.56	Ball	Leads
RER101-36/48/2P	90	1	48	43 to 53	13.5	69	55	0.56	Ball	Leads

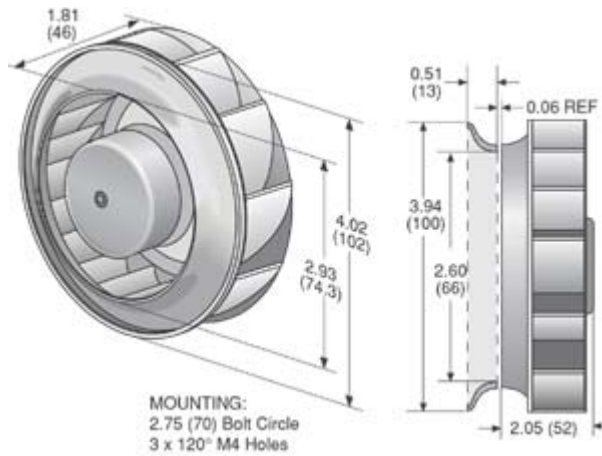

E-mail: [sales@ebm.com](mailto:sales@ebm.com) • TEL: 860-674-1515 • FAX: 860-674-8536  
 ebm Industries Inc., 100 Hyde Road, Farmington, CT 06034 USA  
 ebm Industries, Inc., 2000-2002 • ebm Industries, Inc. reserves the right to change any specifications or data without notice

Page Reference  
RER101-8/29/2003