


Part Number: AS35 3R030

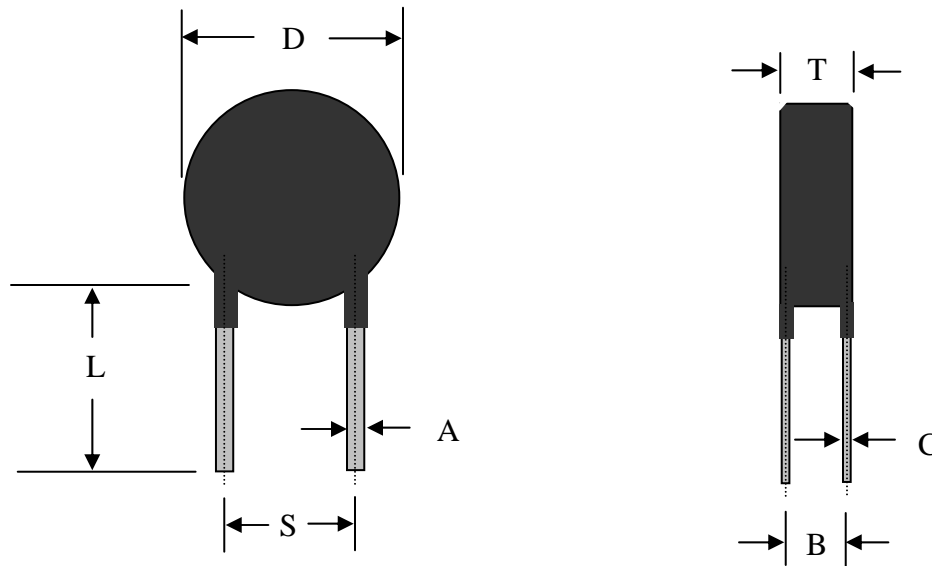

Electrical Specifications:

Resistance @ 25°C	3.0 Ω ± 25 %
Max Steady State Current Up to 65°C	30.0 A
Max recommended energy rating (Joules)	600.0 J
Actual failure point of instantaneous energy (Joules)	1200.0 J
Resistance @ 100% of Max Current	0.020 Ω
Resistance @ 50% of Max Current	0.048 Ω
Body Temperature @ 100% Current rating	226 °C
Dissipation Constant	83.50 Mw/°C
Thermal Time Constant	55 seconds
Material Type	B
ROHS Compliant	Yes
MSL (moisture sensitivity level)	#2

Mechanical Specifications:

D	36.0 mm Max
T	8.5 mm Max
S	19.0mm Nom
Straight Leads Coating run down	6.0 mm Max
L	21.0 mm Nom
A (Lead Width)	2.2 mm Nom
B	5.5 mm Nom
C (Lead Thickness)	0.8 mm Nom

Revision Date: 2/2/10