


P/N 3385-20-1-0500-0XX-1-TS

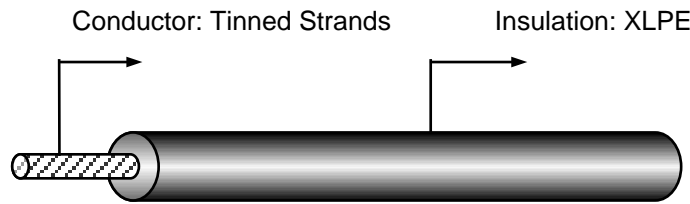

UL3385 XLPE Wire 105°C 300V (20AWG)

| | |
|--|--|
| CONSTRUCTION: | Tinned Strands, copper conductor, 21/0.180mm strands. Overall Diameter=1.85+/-0.10mm Insulation Thickness: 0.38mm |
| CERTIFICATION & APPROVALS: | DUAL-RATED AWM: Can be used in USA and Canada UL Subject 758 UL FILE NO:E108485 CSA Standard CSA FILE NO:LL84687 Printed Markings: AWG 3385 105°C 300V E108485-S ()AWG -H- REI HSING CSA AWM I A 125° 300V LL84687 ()AWG FT2 HF |
| PHYSICAL & ELECTRICAL PROPERTIES: | Rated Temperature: 105°C ~ -10°C Rated Voltage: 300V Insulation Potential Strength: 2000 VAC/min. Flexibility: XLPE Insulation Maximum Conductor Resistance: 39.5 ohm/km Resistant to: Oil, hot & cold, lighter, flexing. |
| APPLICATIONS: | XLPE Wire, pass FT2 flame test Halogen Free (Cl, Br </=900ppm each, CL+BL </=1500 ppm in total) Suitable for internal wires of household appliance, headlamp, mechanical etc. |
| PACKAGING: | 500ft per reel. |
| ENVIRONMENTAL APPROVALS: | Conforms to all current RoHS directives as laid out in EU Directive 2011/65/EC. Current SGS reports for this wire are available upon request. |

P/N's & COLORS

| | | | | |
|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|---|
| 3385-20-1-0500-001-1-TS BLACK | 3385-20-1-0500-002-1-TS WHITE | 3385-20-1-0500-003-1-TS YELLOW | 3385-20-1-0500-004-1-TS RED | 3385-20-1-0500-005-1-TS BLUE |
| 3385-20-1-0500-006-1-TS BROWN | 3385-20-1-0500-007-1-TS GREEN | 3385-20-1-0500-008-1-TS ORANGE | 3385-20-1-0500-010-1-TS VIOLET | 3385-20-1-0500-011-1-TS GREEN + YELLOW |