




Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consumption



Descriptions :

The 339-1 LED lamp contain two integral chips and is available as both bicolor and bipolar types.

The Super Red and Green light is emitted by diodes of GaAlAs and GaP respectively.

Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused

Applications :

- TV set
- Monitor
- Telephone
- Computer

PART NO.	Chip		Lens Color
	Material	Emitted Color	
339-1SRVGW/S150/F14-20	GaAlAs	Super Red	White Diffused
	GaP	Green	




Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Package Dimensions

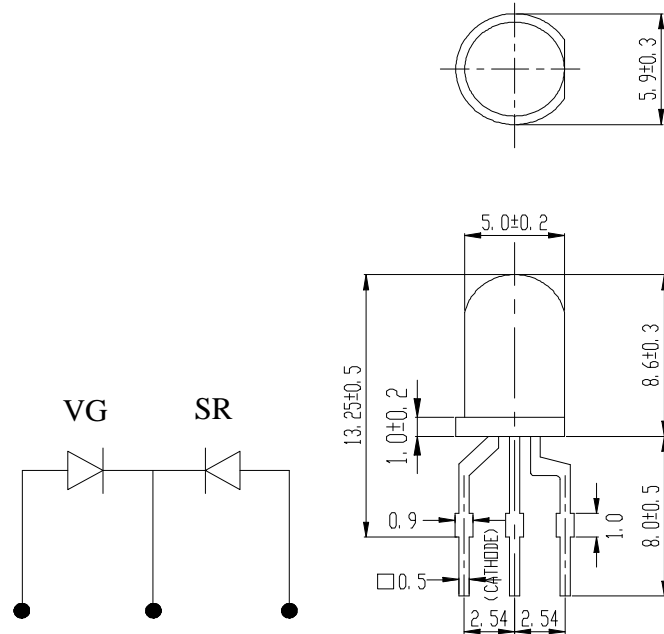

Notes: 1. All dimensions are in millimetres

2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

3. Tolerances unless Dimension ± 0.25 mm.

Absolute Maximum Ratings at $T_a = 25$

Parameter	Symbol	Rating	Unit
Forward Current	I_F	SR 40	mA
		VG 30	
Operating Temperature	T_{opr}	-40 to +85	
Storage Temperature	T_{stg}	-40 to +100	
Soldering Temperature	T_{sol}	260 ± 5	
Power Dissipation	P_d	SR 110	mW
		VG 100	
Peak Forward Current	$I_F(\text{Peak})$	SR 180	mA
		VG 160	
Reverse Voltage	V_R	5	V

Note: *1: I_F Conditions --Pulse Width 1msec and Duty 1/10.

*2:Soldering time 5 seconds.



Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Electro-Optical Characteristics (Ta=25 °C)

Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	SR	25.0	63.0	/	mcd	IF= 20 mA
		VG	25.0	40.0	/		
Viewing Angle	2 1/2		/	50	/	deg	IF= 20 mA
Peak Wavelength	p	SR	/	660	/	nm	IF= 20 mA
		VG	/	570	/		
Dominant Wavelength	d	SR	/	643	/	nm	IF= 20 mA
		VG	/	571	/		
Spectrum Radiation Bandwidth		SR	/	20	/	nm	IF= 20 mA
		VG	/	30	/		
Forward Voltage	VF	SR	1.5	1.7	2.4	V	IF= 20 mA
		VG	1.7	2.1	2.4		
Reverse Current	IR		/	/	10	μ A	VR= 5 V









Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Typical Electro-Optical Characteristic Curves:

(SR)

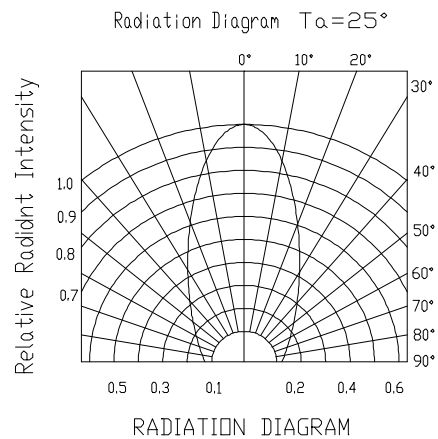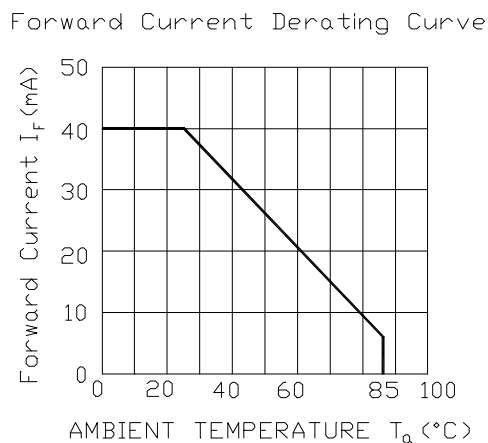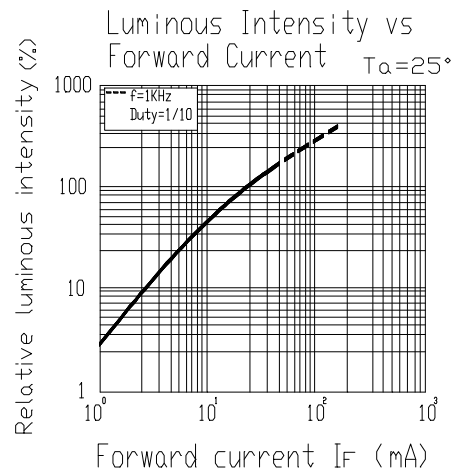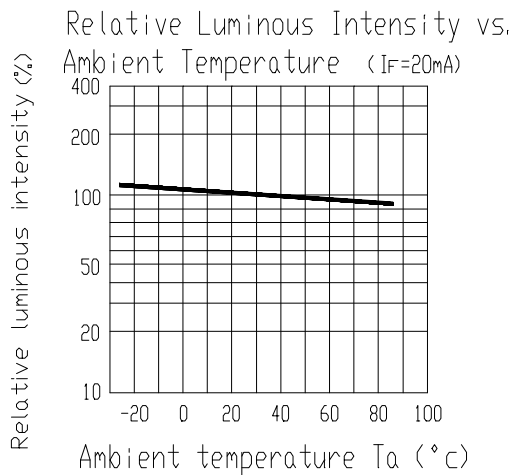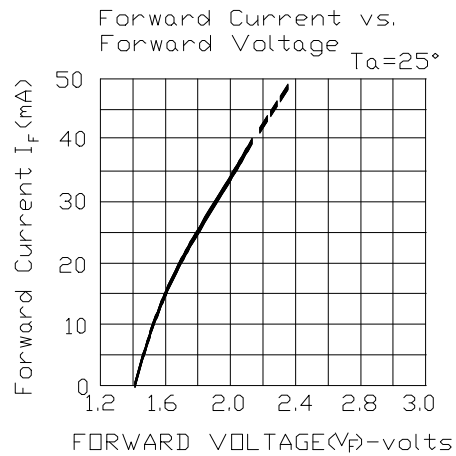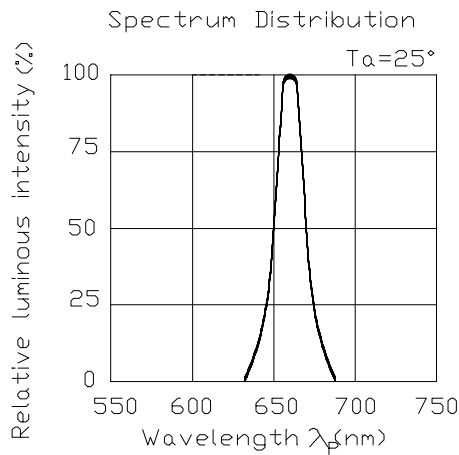









Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Typical Electro-Optical Characteristic Curves:

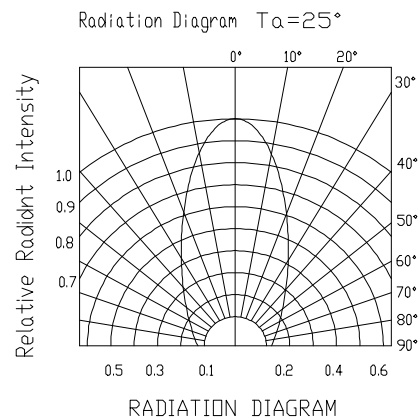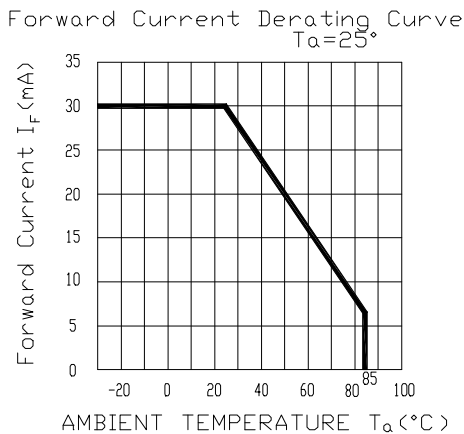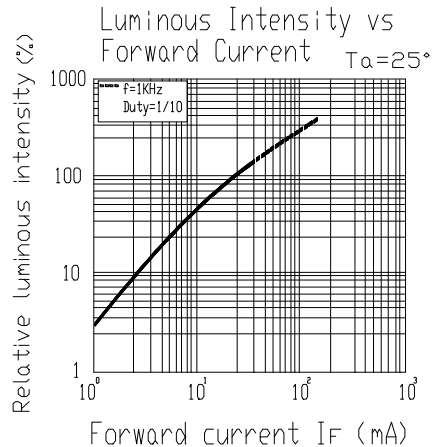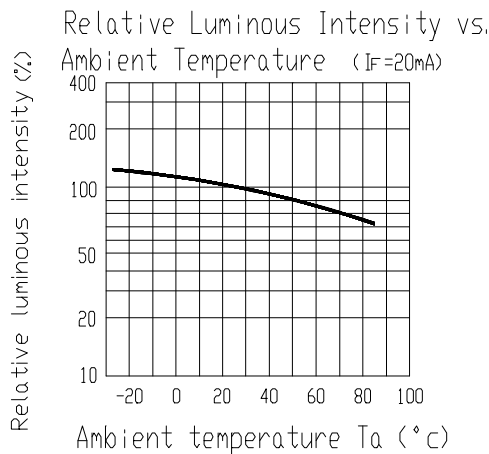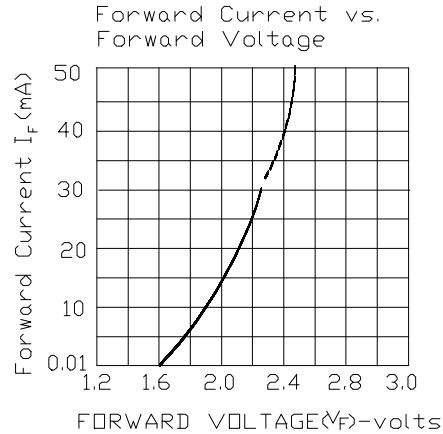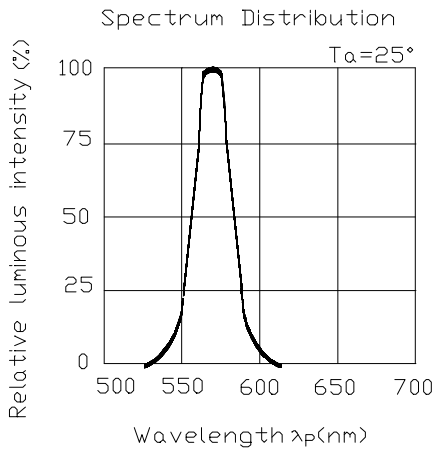



Technical Data Sheet
5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260 ± 5	10 SEC	76 PCS	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -40	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25 I _F = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85 / 85% RH	1000 HRS	76 PCS	0/1



Technical Data Sheet

5.0mm Multi-Color Round Type LED Lamps

339-1SRVGW/S150/F14-20

Packing Quantity Specification

1.1000PCS/1Bag , 6Bags/1Box

2.10Boxes/1Carton

Label Form Specification

EVERLIGHT

CPN:

P/N:



339-1SRVGW/S150/F14-20

QTY:



LOT NO: EL

CAT:

HUE:

REF:

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

MADE IN TAIWAN

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Tel: 886-2-2267-2000, 2267-9936

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Fax: 886-2267-6244, 2267-6189, 2267-6306

Tucheno Tainzi 236 Taiwan R.O.C

http://www.everlight.com