


# GainSpan GS1011M / GS1500M Evaluation Board Mrk II

### **PRODUCT OVERVIEW**

The GS1011M/GS1500M Evaluation Board supports the GS1011M (802.11b) or GS1500M (802.11b/g/n) module family which provides customers the mean to evaluate the capabilities of GainSpan's ultra-low power wireless solutions for Wi-Fi networks. The Serial to Wi-Fi embedded software on the modules allows devices and appliances manufacturers to easily add Wi-Fi capabilities to their products with minor impact on the host microcontroller firmware.

The evaluation board comes with pre-loaded serial to Wi-Fi firmware that supports a Limited AP mode, with built-in web-server for provisioning the device. The evaluation board works in conjunction with the serial to Wi-Fi evaluation kit software and firmware.

The evaluation board has various jumpers, switches, push buttons and LED's that provide support for evaluating different features and configuration based on the firmware loaded from the evaluation kit. For details see the product briefs of the GS1011M or GS1500M modules.

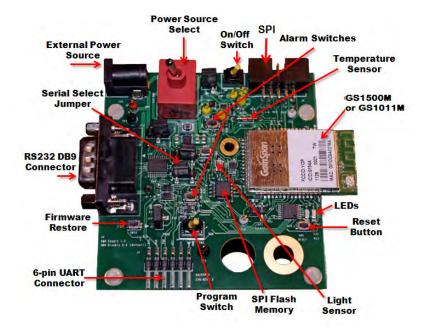



#### **EVALUATION BOARD DETAILS:**

Description IEEE 802.11b/g/n Radio Protocol RF Module(s) GS1011M (802.11b) or GS1500M (802.11b/g/n) Radio Frequency 2.4 - 2.497 GHz **Antenna Type** On-board PCB Trace or External (u.FL) I/O Port 6-pin serial UART (3.3V TTL), RS232 DB9 Connector, SPI Connector 2 LED's to indicate state **LED** Memory External SPI Flash Memory for Firmware Upgrade and Restore **Switches** Push button for Alarms, Reset, WPS, and Configuration **Program Switch** For programming the module On/Off Switch Power on/off switch Serial Select Jumper to select between UART or RS232 interface or **Jumper** Sensors Temperature and Light **Power Source** Battery or External Power Adapter **Battery** Two 1.5V AA Battery (Alkaline or Lithium) Lithium is recommended for longer battery life **Power Source** Select power source as either battery or external power Select adapter **Power Adapter** 3.3V

### **EVAL BOARD ORDERING INFORMATION**

## **PART NUMBER**

## Description

GS1011MIP-EVB2-S2W-WEB GS1011MIE-EVB2-S2W-WEB GS1011MEP-EVB2-S2W-WEB GS1011MEE-EVB2-S2W-WEB

Serial to Wi-Fi Evaluation Board with – GS1011MIP module Serial to Wi-Fi Evaluation Board with – GS1011MIE module Serial to Wi-Fi Evaluation Board with – GS1011MEP module Serial to Wi-Fi Evaluation Board with – GS1011MEE module

GS1500M-EVB-S2W-WEB Serial to Wi-Fi Evaluation Board with – GS1500M module



 $3.5 \times 3.0$  (includes module and

RS232 connector)



Dimensions (in)