
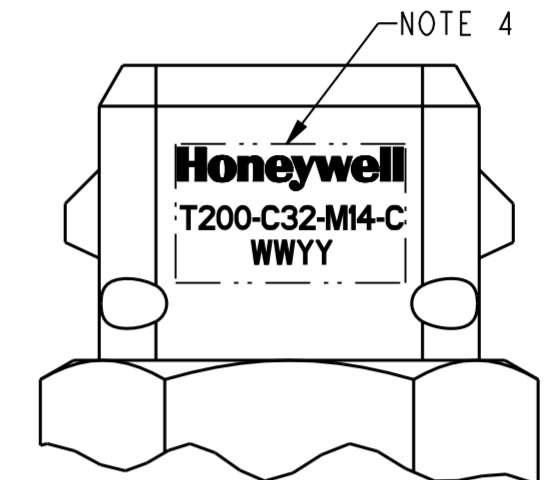
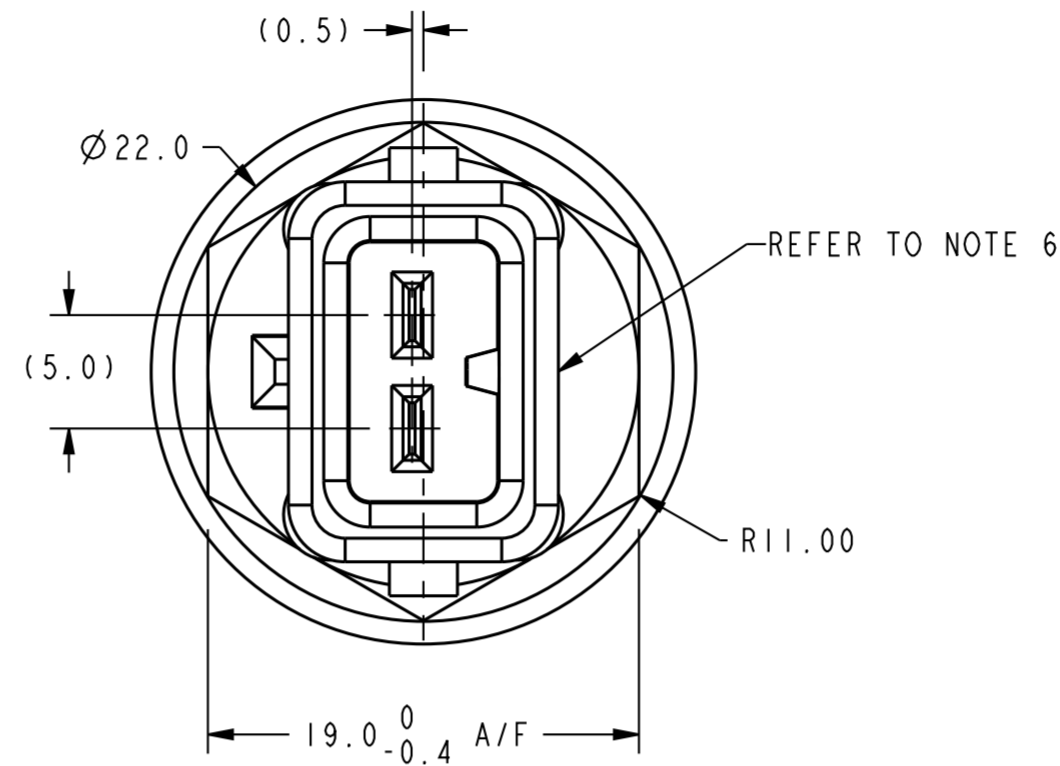


REV	CHANGE DOCUMENT	CHANGED BY	CHECK
A	0080611	BNR 16AUG11	DSK

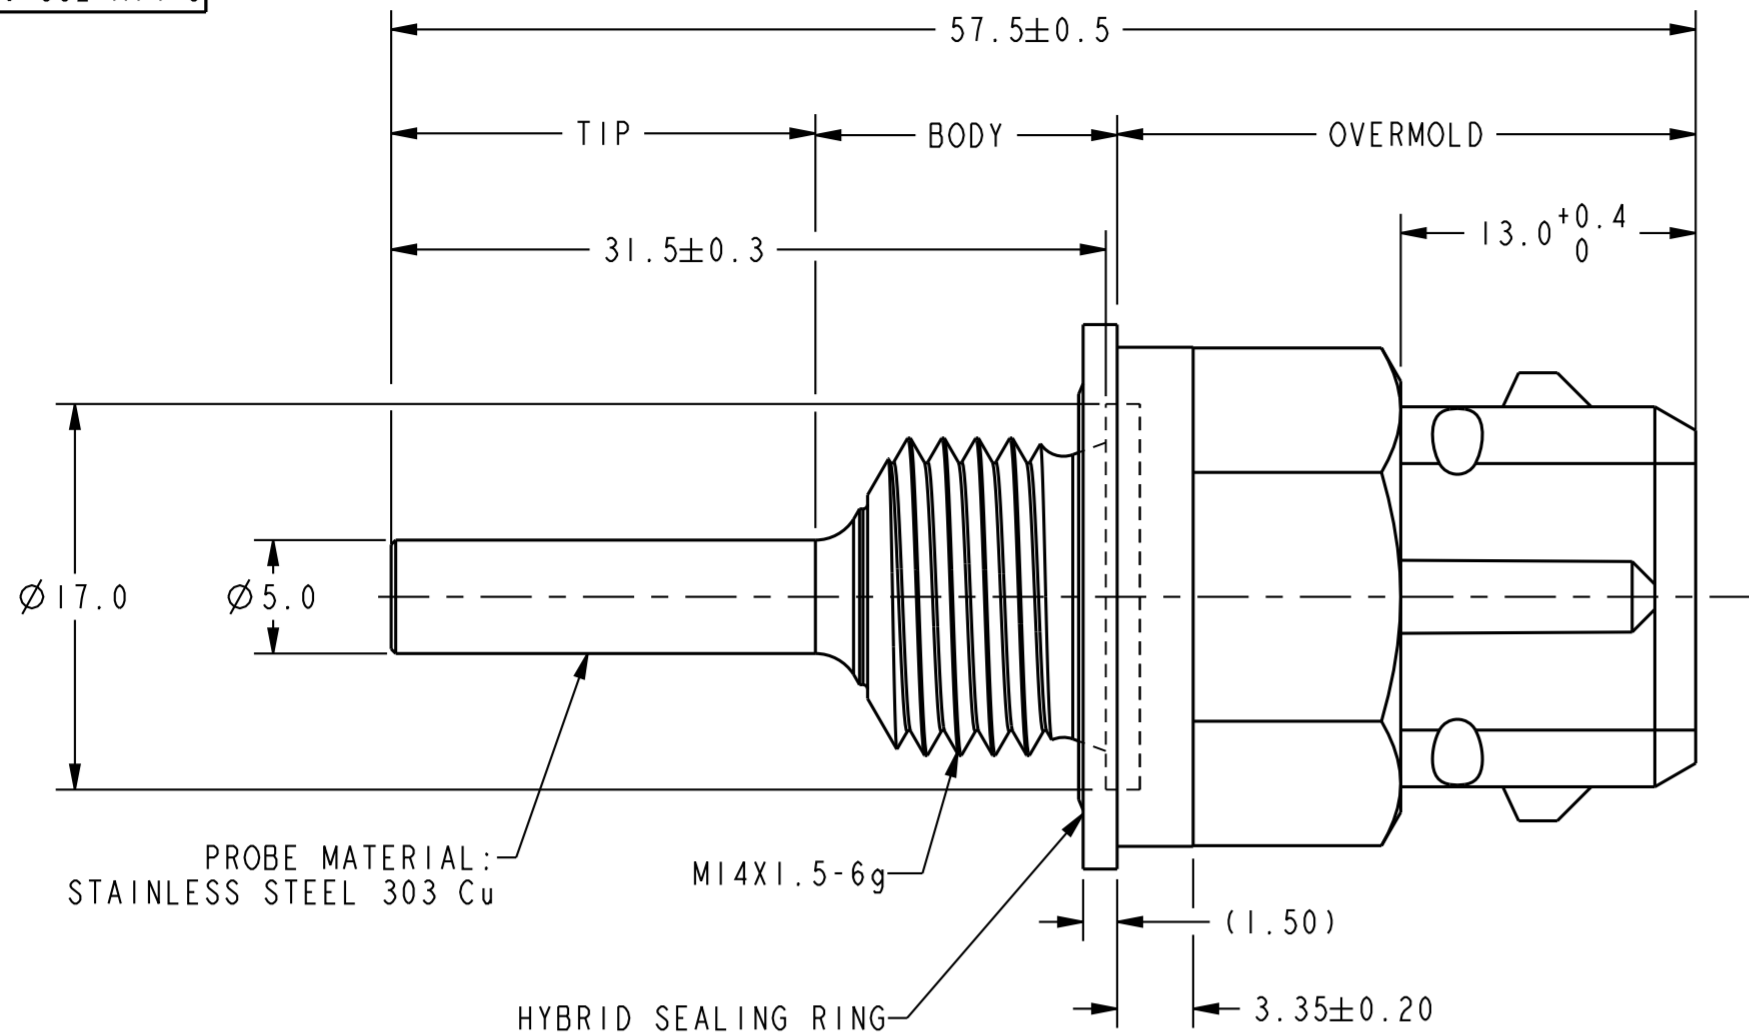

## LASER MARKING DETAILS

## NOTES

- 1 - MASS OF PRODUCT - 23g.
- 2 - FINAL INSTALLATION TORQUE TO  $15 \pm 3$  N-m.
- 3 - CONNECTOR OVERMOLD PLASTIC MATERIAL : LCP - 30% GLASS FILLED.
- 4 - FOLLOWING INFORMATION IS LASER MARKED ON THE CONNECTOR FACE.  
HONEYWELL LOGO  
HONEYWELL PART NO.  
MANUFACTURING WEEK AND YEAR IN THE FORM WWYY  
EXAMPLE 1707 FOR PART MANUFACTURED ON APR 27 2007 Viz WK17 2007.
- 5 - SENSOR MUST BE USED WITH SEALING WASHER IN PLACE.
- 6 - RoHS COMPLIANT.

## VOLTAGES

TYPICAL POWER SUPPLY :  $V_p = +5V \pm 0.1V$


## THERMISTOR CHARACTERISTICS

RESISTANCE AT 25°C :  $R_{25} = 2k\Omega \pm 3.75\%$

BETA 25/85 : B25/85 = 3420K±1%

TABLE I: PROBE R-T CHARACTERISTICS

Temperature (°C)	Resistance (Ohms)			Temp. Tol. (± °C)
	Minimum	Nominal	Maximum	
-40	36308	39650	42992	1.5
-20	12890	13844	14798	1.4
0	5179	5489	5799	1.3
20	2316	2419	2522	1.1
25	1925	2000	2075	1.0
50	805.8	833	860.2	1.0
80	326.7	336.1	345.5	1.0
100	190.7	197.3	203.8	1.3
150	60.93	63.77	66.61	2.2
180	34.45	36.26	38.08	2.8
200	24.49	25.87	27.25	3.3

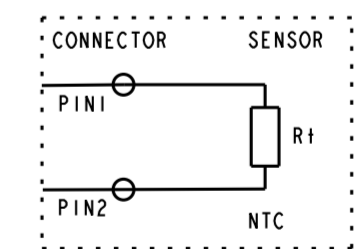

SCHEMATIC VIEW

INPUT DATA	MAX OPERATING TEMPERATURE OF PROBE	+200°C CONTINUOUS
	MIN OPERATING TEMPERATURE OF PROBE	-40 °C
	SUPPLY VOLTAGE RANGE	+5VDC±4% TYPICAL
	SUPPLY VOLTAGE PROTECTION	NONE
	SHORT CIRCUIT PROTECTION	NONE
OUTPUT DATA	TYPE	PASSIVE
	TRANSFER FUNCTION	DEPENDENT ON SYSTEM CIRCUIT, SEE TABLE I FOR TEMP. V <sub>s</sub> RES. OUTPUT
	RESPONSE TO STEP INPUT CHANGE	TIME CONSTANT T63.2%, IN 10m/s GAS FLOW @ 150°C <15.0s
ENVIRONMENTAL DATA	OPERATING TEMPERATURE RANGE OF PROBE BODY	-40 °C TO +200 °C CONTINUOUS
	STORAGE TEMPERATURE RANGE	-40 °C TO +150 °C
	APPLICATION	ENGINE APPLICATION
	VIBRATION RANDOM	30g PEAK
INSTALLATION GUIDELINES	PROBE TO HOUSING SEAL	HYBRID SEALING RING
	CONNECTOR SEAL	IP59K
	HARNESS/HOUSING INTERFERENCE SEAL	GOLD PLATED CONTACT TERMINALS IN OVERMOLDED CONNECTOR
	WIRE SEALED	N/A
	MATING CONNECTOR	TYCO JPT CONNECTOR PART# 282762-1
	MOUNTING	M14X1.5- 6H PORT

DESIGN UNITS: MM  
TOLERANCES UNLESS NOTED:

DRAWN	RK	19 JULY 11
CHECK	GK	19 JULY 11

THIS DRAWING COVERS A PROPRIETARY ITEM  
AND IS THE PROPERTY OF HONEYWELL.  
THIS DRAWING IS NOT TO BE COPIED OR USED  
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994  
OTHER HONEYWELL ENGINEERING  
STANDARDS MAY APPLY

THIRD ANGLE PROJECTION



## TEMPERATURE SENSOR

SIZE	TYPE	DRAWING NAME	REV
A2	I	50059659	A

3D	SCALE	3 : 1		SHEET	OF	
----	-------	-------	--	-------	----	--