



### ECOFOAM<sup>™</sup> CONDUCTIVE FOAM

Laird's Ecofoam<sup>™</sup> offers an innovative approach to traditional shielding and grounding by providing X, Y and Z-axis conductivity, enhancing the shielding effectiveness required to meet the increasing microprocessor speeds of today's computer, telecommunications and other electronic equipment. The product is offered with a conductive PSA tape on one side. Ecofoam<sup>™</sup> can be customized to your application by die-cutting, hole-punching, notching, and so on and is especially useful for odd-shaped applications which are difficult to shield with typical profile gaskets. Ecofoam<sup>™</sup> is designed for low-cycling applications such as input/output (I/O) shielding and other non-shear standard connectors.

### FEATURES



- RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Excellent z-axis conductivity to provide effective EMI shielding and grounding
- Low compression forces allow for use of lighter materials
- Conductive PSA on one side

### MARKETS

- Servers
- Cabinet Applications
- Network and Telecommunication Equipment
- LCD and Plasma TV
- Medical Equipment
- Desktop Computers
- Printers
- Laptop Computers
- Tablets and Smartphones

#### ECOFOAM<sup>™</sup> 500-SERIES (WITH CPSA TAPE)


Thickness	Designation
0.3 mm	CF503
0.5 mm	CF505
0.7 mm	CF507
1.0 mm	CF510
1.5 mm	CF515
2.0 mm	CF520
2.5 mm	CF525
3.0 mm	CF530
3.5 mm	CF535
4.0 mm	CF540




**EcoFoam<sup>™</sup> 500-Series with CPSA**

Metallized Foam  
Adhesive Layer  
Metallized Fabric Tape  
Conductive PSA

### FORCE/DISPLACEMENT/RESISTANCE (FDR)

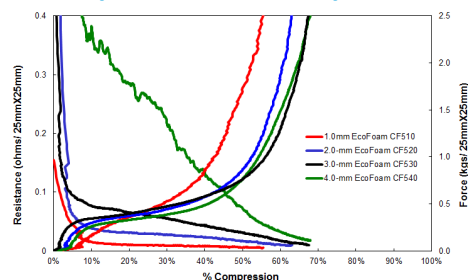

### SHIELDING EFFECTIVENESS

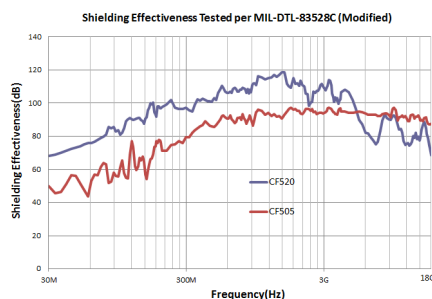

ITEM	UNIT	VALUE	TEST METHOD
Thickness	mm (±0.2 mm) mm (±0.5 mm)	0.3, 0.5, 0.7 1.0, 1.5, 2.0, 2.5, 3.0, 4.0	-
Z-Axis Resistance*	Ω	<0.2	Laird Internal
Shielding Effectiveness			MIL-DTL-83528C (modified)
300 MHz	dB	87 average	
3 GHz	dB	108 average	
18 GHz	dB	78 average	
Compression Set	%	< 30	ASTM D3574
Foam Density	kg/m <sup>3</sup>	30 ±5	-
Operation Temperature	°C	-40 to 85	
Hazardous Substance		Compliant with RoHS (Directive 2002/95/EC)	
		Halogen-free per IEC-61249-2-21 Standard	
Shelf Life		12 months at 23°C/ 60% R.H.	

\*25mm x 25mm Test Sample, 1000 gf loading

Values presented have been determined by standard test methods and are typical values not to be used for specification purposes.

### ORDERING INFORMATION

#### PART NUMBER EXAMPLE

Digits:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	C	F	5	2	0	A	A	0	1	0	5	0	2	0	0
	PRODUCT NAME (CF500/CF600/CF700 series) EX: CF520					SITE ENG CODE: this is defined by site eng team (refer to "SITE ENG CODE" sheet) AA, AB, AC...A9 etc			PRODUCT WIDTH(WIDEST) EX: 0105=10.5mm			PRODUCT LENGTH (LONGEST) EX: 0200=20.0mm EX: 020M=2.0m (if the part length is over 999.9mm, please define digit #15 as m[meter])			

EMI-DS-FOF-ECOFOAM-500\_060215

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird, Laird Technologies, Inc. or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.