




Chicago Miniature Lighting, LLC

Lighting the world since 1910

7512F Series Bright ★ Pipes™ Flexpipe™ Fiber-Optic Lightpipe


DESCRIPTION AND FEATURES

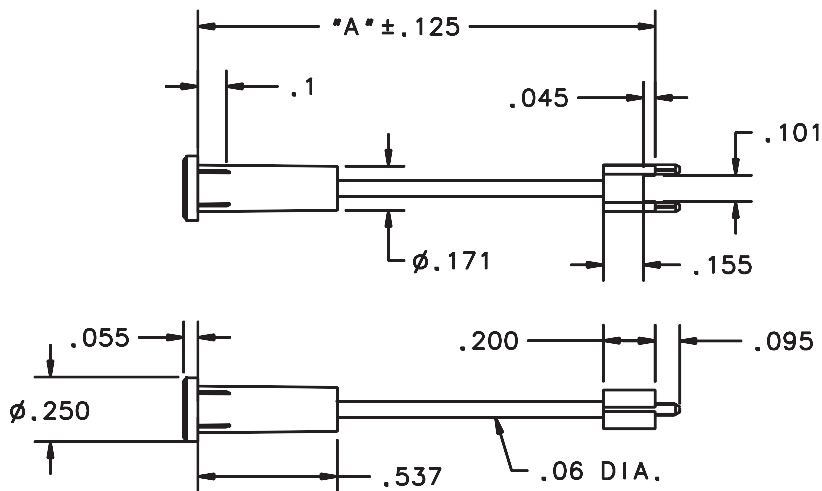

Series Number Dim A length (in mm)
7512FPR- 305 (standard model)
7512FPR- XXX*

*Note: • Standard model length is 305 mm.
Product is available in lengths of 100 - 1800 mm
in increments of 25 mm. Replace the XXX with
the length of your choice.
Minimum order quantities may apply,

FRONT TO PRESS FIT INTO
.187 \pm .002 DIA. HOLE CIRCUIT
BOARD MOUNTING PATTERN FOR USE
WITH CMDA19 SERIES LED.

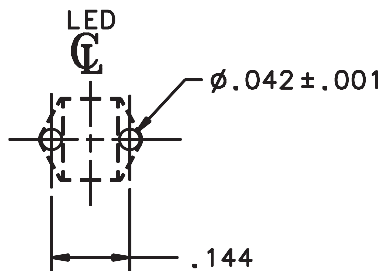

- Flexible optical lightpipe with precision fiberoptics for long distance SMT LED to lens.
- Eliminates need for precision mechanical alignment of components to panel.
- 7512F is designed for use with CMDA19 series Bright Chip LEDs.
- Precision engineered with ray tracing for bright, optically precise even indication and attractive appearance.

- ESD protection from circuitry for exceptional reliability.
- High contrast and wide viewing angle for greater visibility.
- Parts inserted after reflow to permit LED pad inspection before assembly.
- Large lens provides high visibility.
- Water clear optics for variety of LED colors.

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product

7512F Series Bright ★ Pipes™ Flexpipe™
Fiber-Optic Lightpipe